

80MHz/50MHz ARBITRARY FUNCTION GENERATOR



Fulfilling Your Diversified Waveform Needs

The AFG-31000 Series is an Arbitrary Waveform and Digital-Synthesized Function Generator designed for industrial, scientific research and educational applications. The series comes with bandwidth of 80MHz for AFG-31081 and 50MHz for AFG-31051. The AFG-31000 Series, featuring 200MSa/s sample rate, 100MHz repetition rate by true point-by-point edit, 16-bit vertical resolution and 1M points waveform length, is a very useful and flexible signal source to meet diversified application needs in the market today.

The user-friendly operation, the On-Screen Help, and the multiple ways of arbitrary waveform editing make AFG-31000 just a plug-and-play equipment. The point by point waveform data entry or standard waveform clip piling through front panel operation, the CSV file waveform data download, the direct waveform reconstruction through DSO waveform data import, and the PC software edited waveform download are the 4 methods available for arbitrary waveform editing.

A 4.3-inch high resolution TFT LCD in the AFG-31000 front panel is used to display waveform and set parameters. The large and high-resolution screen is especially useful when the arbitrary waveform construction is done through front panel operation. The impedance of AFG-31000 can be selected between 50 Ohm and Hi-Z to ensure right impedance compatibility between AFG and DUT.

Easy Operation And Flexible Arbitrary Waveform Editing


The AFG-31000 presents four ways to generate custom arbitrary waveforms from direct front panel operation, PC software, a CSV file loading, and GBS-1000 Series oscilloscope input.

Front Panel Operation



Panel Operation


CSV file Download



Supports CSV file


From Math Computing Software, Program and Result in CSV File

Direct Waveform Reconstruction (DWR)

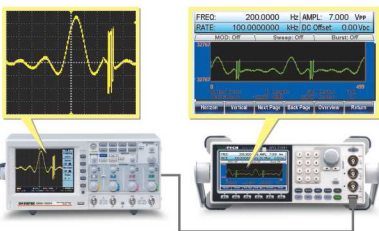

Direct Waveform Reconstruction from the GBS-1000 Series

Arbitrary Waveform Editing PC Software



A Sinc Waveform with Gaussian Noise

Gaussian Noise

AFG-31000 Series

FEATURES

- Wide Frequency Range From 1μ Hz ~ 80/50MHz
- 1μ Hz Frequency Resolution Throughout Full Range
- Standard Waveform : Sine, Square, Triangle, Ramp, Pulse, Noise
- Built-In AM, FM, PWM, FSK, Sweep, Burst Functions
- 16bit, 200MSa/s, 1M-Point Deep Arbitrary Waveform
- DWR (Direct Waveform Reconstruction) Capability
- Arbitrary Waveform Editing PC Software
- 4.3" High Resolution LCD Display
- GPIB, RS-232C, USB Host/Device Standard Interfaces



APPLICATIONS

- Power Supply/Transformer Simulations
- Traditional/Motor Power Applications
- Laboratory and Educational Research
- Pulse Signal as Trigger or Synchronization
- Automotive Electronics Applications

SPECIFICATIONS			
		AFG-31081	AFG-31051
WAVEFORMS	Standard Waveform	Sine, Square, Ramp, Pulse, Noise, DC, Sin(x)/x, Exponential Rise, Exponential Fall, Negative Ramp	
ARBITRARY WAVEFORMS	Sample Rate Repetition Rate Waveform Length Amplitude Resolution	200 MSa/s 100MHz 1M points 16 bits	
FREQUENCY CHARACTERISTICS	Range	Sine, Square	80MHz
		Triangle, Ramp	50MHz
	Resolution	1μHz	
	Accuracy	±1 ppm 0 ~ 50℃	
OUTPUT CHARACTERISTICS	Amplitude	Range	10 mVpp to 10 Vpp( into 50Ω)
		Accuracy	± 1% of setting ±1 mVpp (at 1 kHz,>10 mVpp)
	Offset	Resolution	0.1 mV or 4 digits
		Units	Vpp, Vrms, dBm, Range
	Waveform Output	±5 Vpk ac +dc (into 50Ω)	
	SYNC Output	Accuracy Protection Level	
		1% of setting + 2 mV+ 0.5% of amplitude Short-circuit protected ; overload relay auto-matically disables main output TTL-compatible into>1kΩ	
SINEWAVE CHARACTERISTICS	Harmonic Distortion	60 dBc DC ~ 1 MHz, Ampl<3 Vpp 55 dBc DC ~ 1 MHz, Ampl>3 Vpp 45 dBc 1MHz ~ 5 MHz, Ampl>3 Vpp 30 dBc 5MHz ~ 80 MHz, Ampl>3 Vpp	
SQUARE WAVE CHARACTERISTICS	Rise/Fall Time	<8 nS	
	Duty Cycle	20% ~ 80%	
RAMP CHARACTERISTICS	Overshoot	< 5%	
	Asymmetry	1% of period+1 ns	
PULSE CHARACTERISTICS	Linearity	< 0.1% of peak output	
	Variable Symmetry	0% ~ 100%	
AM MODULATION	Period	20ns ~ 2000s	
	Pulse Width	8ns ~ 1999.9s	
FM MODULATION	Carrier Waveforms	Sine, Square, Triangle, Ramp, Pulse, Arb	
	Modulating Waveforms	Sine, Square, Triangle, Up/Dn Ramp	
	Modulating Frequency	2mHz ~ 20kHz	
	Depth	0% ~ 120.0%	
FM MODULATION	Carrier Waveforms	Sine, Square, Triangle, Ramp	
	Modulating Waveforms	Sine, Square, Triangle, Up/Dn Ramp	
	Modulating Frequency	2mHz ~ 20kHz	
	Peak Deviation	DC ~ 80MHz	
PWM	Carrier Waveforms	DC ~ 50MHz	
	Modulating Waveforms		
	Modulating Frequency		
	Deviation		
FSK	Carrier Waveforms	Square	
	Modulating Waveforms	Sine, Square, Triangle, Up/Dn Ramp	
	Modulating Frequency	2mHz ~ 20kHz	
	Deviation	0% ~ 100.0% of pulse width	
SWEEP	Carrier Waveforms	Sine, Square, Triangle, Ramp, Pulse	
	Modulating Waveforms	50% duty cycle square	
	Internal Rate	2 mHz ~ 100 kHz	
	Frequency Range	DC ~ 80MHz	
BURST	Waveforms	DC ~ 50MHz	
	Type		
	Start / Stop FREQ	Sine, Square, Triangle Linear or Logarithmic	
	Sweep Time	100μ Hz ~ 80 MHz	
MARKER OUTPUT	Waveforms	1ms ~ 500s	
	Frequency	Sine, Square, Triangle, Ramp	
	Burst Count	1μ Hz ~ 80MHz	
	Start / Stop Phase	1 ~ 1000000 cycles or Infinite	
SYSTEM CHARACTERISTICS	Internal Period	-360.0 ~ +360.0°	
	Trigger Delay	1ms ~ 500s	
	Type	N-Cycle, Infinite : 0s ~ 85s	
	Level		
POWER SOURCE	Fan-out	for ARB, Sweep	
		TTL Compatible into 50Ω	
		≥4 TTL load	
POWER CONSUMPTION	Impedance	50Ω typical	
	Store/Recall	10 Groups of Setting Memories	
	Interface	GPIB, RS-232C, USB	
	Display	4.3 inch TFT LCD, 480 x 3 (RGB) x 272	
DIMENSIONS & WEIGHT			

Specifications subject to change without notice. FG-3000GD1DH

ORDERING INFORMATION		OPTIONAL ASSESSORIES	
AFG-31081	80MHz Arbitrary Function Generator	GTL-232	RS-232C Cable
AFG-31051	50MHz Arbitrary Function Generator	GTL-246	USB Cable, USB 2.0 A-B Type Cable, 4P
ACCESSORIES		GTL-248	GPIB Cable (2.0m)
CD(User manual+Software)×1,Quick Start Guidex1, Power Cordx1, GTL-110 Test Leadx1		FREE DOWNLOAD	
		PC Software Arbitrary Waveform Editing Software	

ISO-TECH

P. O. Box 99  
Corby  
Northants NN17 9RS  
England  
Tel: +44(0) 1536 201234

AFG-31000 Series

ISO-TECH