



Model 4391

BNC Resistor Attenuator

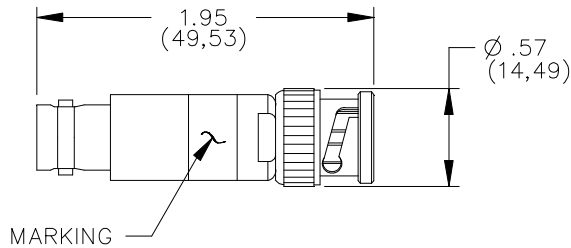

SCHEMATIC

DERATING CURVE

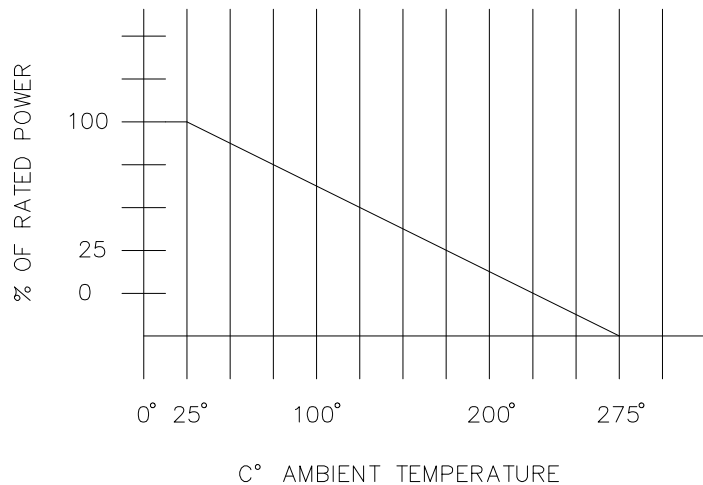

MODEL NUMBER	*RESISTANCE VALUE Ω
4391-50	50
4391-75	75
4391-600	600

FEATURES:

- Use to add series resistance to coaxial lines with BNC connectors.

MATERIAL:

Body and Fittings: Brass, Alloy 360, 1/2 Hard

Center Contact: Male – Brass, Alloy 360, 1/2 Hard

Female – Beryllium Copper per
ASTM B196 and B197 Cond. HT

Outer Contact: Beryllium Copper, per ASTM B196
and B197 Cond. HT

Dielectric: Teflon per ASTM D1457

Gasket/Seals: Silicone rubber per ZZ-R-765, Class
11, Grade 50

Resistor: Non-inductive film resistor

Finish: Body and Fittings: Tarnish resistant

Center Contact: Male – Gold plated

Outer Contact: Tarnish resistant

Marking: “Pomona 4391-50 2W”

“50 Ohm Attenuator”

RATINGS:

Operating Temperature: +102° C (+216° F) Max.

Frequency Range: DC to 500 MHz

Resistance Tolerance $\pm 1\%$

Power: 2W @ 25° C Max.

ORDERING INFORMATION: Model 4391

See table above.

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Distribuido Por:

www.finaltest.com.mx

Calle del Ebano #16625

Tijuana B.C. Mexico

Tel. (664)681-1130

Tel. 01800 027-4848

ventas@final-test.net