


# Data Sheet

## Digital Storage Oscilloscopes 2550 Series

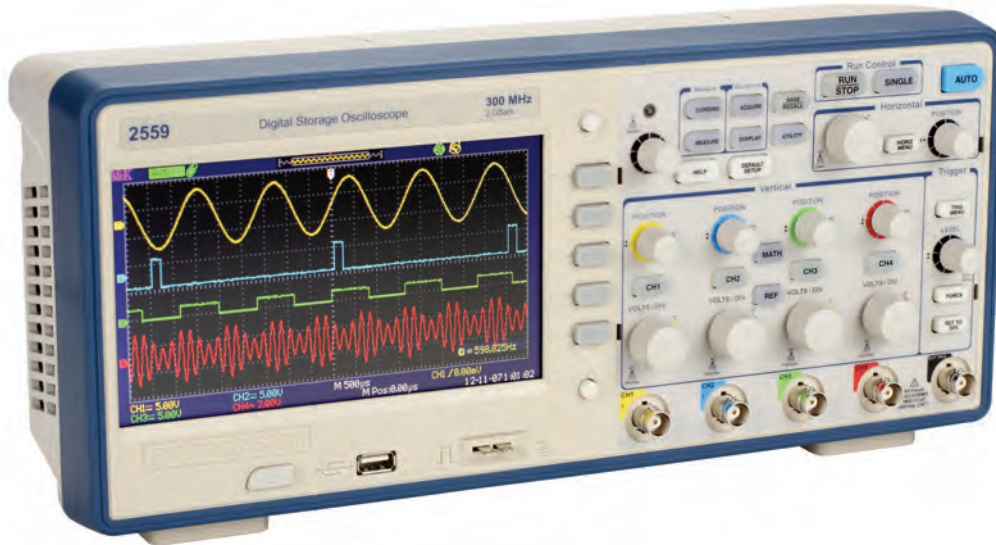


The 2550 series digital storage oscilloscopes provide high performance and value in 2-channel and 4-channel configurations. With bandwidth from 70 MHz to 300 MHz and 2 GSa/s sample rates, these oscilloscopes offer 24 kpts/Ch waveform memory, 32 automatic measurements, and advanced triggering capabilities including math functions. Engineered to allow you to see more of your signal under test, the 2550 series' widescreen 7" TFT display offers a significantly larger viewing area than typical economy oscilloscopes (5.7").

Maximize productivity with PC connectivity via LAN and USB. The downloadable EasyScope PC software lets you easily capture, save, and analyze measurement results. All oscilloscope parameters can be controlled via a PC without the need for programming.

Educators who want to teach waveform measurement fundamentals can benefit from the ability to disable the Auto set button, a function that automatically sets up the scope to display a signal.

The 2550 series oscilloscopes are ideal for applications in design and debug, service and repair, and education.

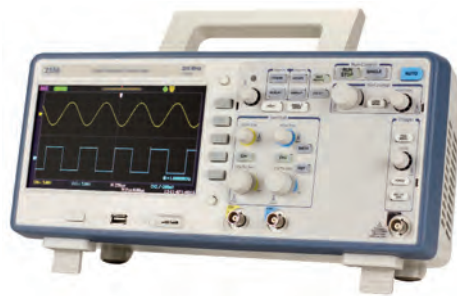


### Features & Benefits


- Bandwidth up to 300 MHz
- 2 GSa/s sample rate
- 4-channel acquisition (on select models)
- Large 7" widescreen color display
- FFT including four additional math functions - Add, Subtract, Multiply, and Divide
- 32 automatic measurements
- 50 Ω input coupling (200 MHz and 300 MHz models)
- Standard LAN (supports SCPI) and USB device port (USBTMC compliant) for remote PC control
- Front and rear panel USB host port for saving and recalling waveform setups, data, and screenshots on a USB flash drive
- PC control through EasyScope software
- Advanced tools include digital filters with adjustable limits, pass/fail testing and waveform recorder mode
- Multi language user interface and context sensitive help

Model	2553	2555	2556	2557	2558	2559
Bandwidth	70 MHz	100 MHz	200 MHz		300 MHz	
Channels	4		2	4	2	4

## Front panel

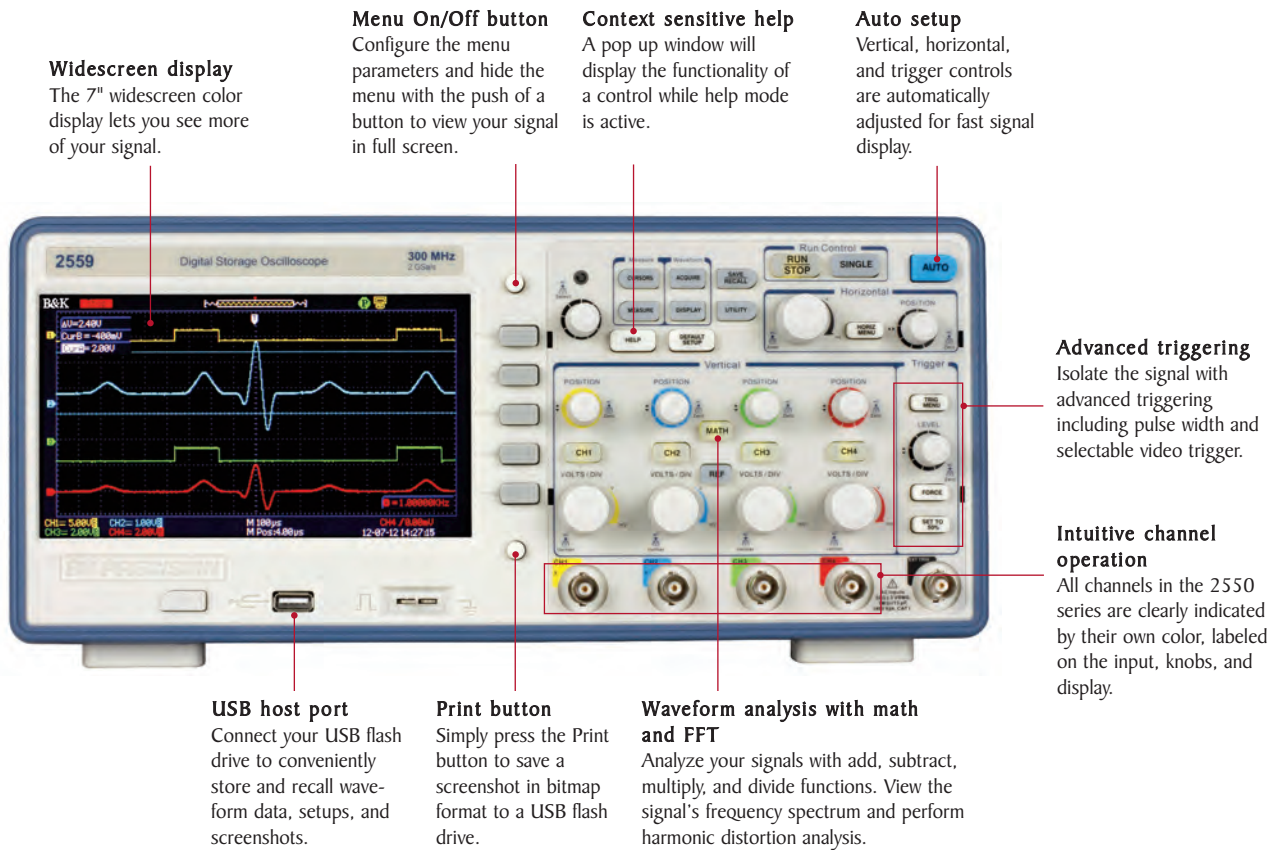


## Rear panel

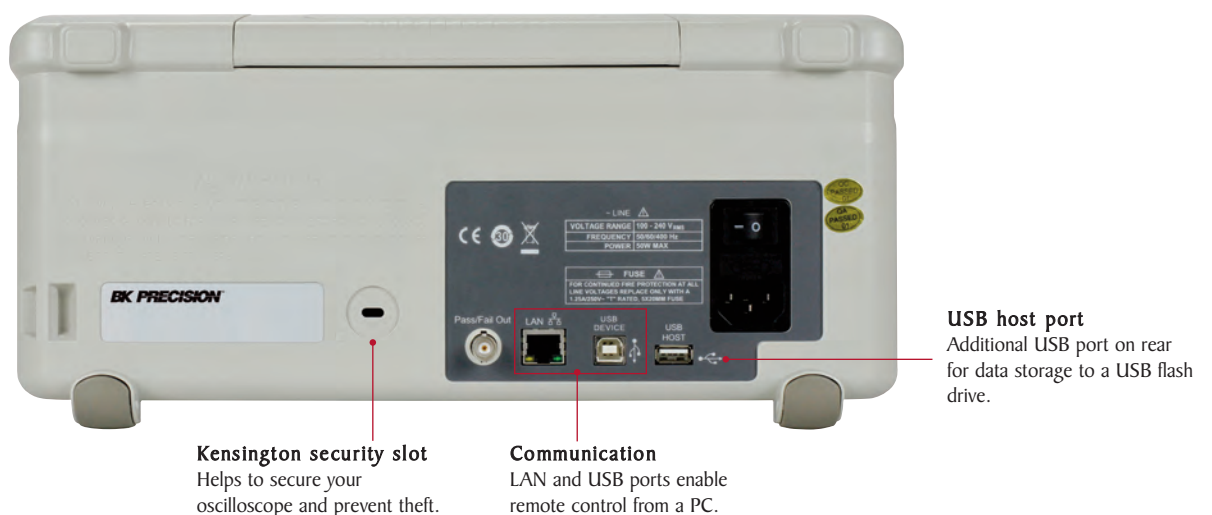


## The tools you need

### Powerful measurement functions

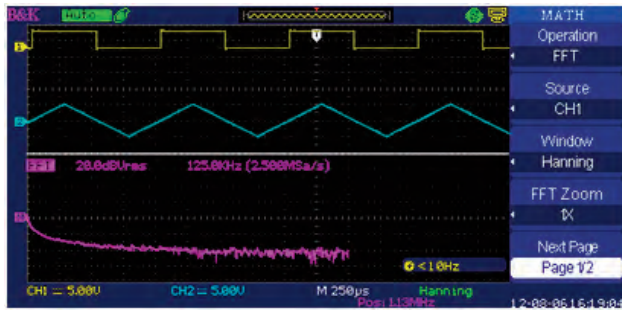


Display and measure the input signal's frequency spectrum. Select one of the 4 FFT windows: Rectangular, Hanning, Hamming, and Blackman. Use cursors to measure the spectral component's magnitude and frequency.

### Waveform recorder

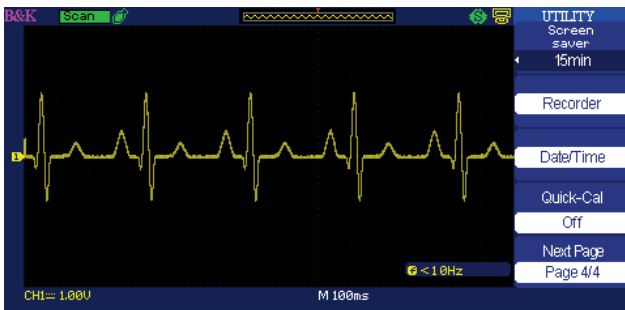


Monitor and analyze long-term signal behavior by recording data continuously over an extensive period of time and playing it back for post acquisition analysis. Data is recorded in a sequence of up to 2500 frames.

### Large internal storage

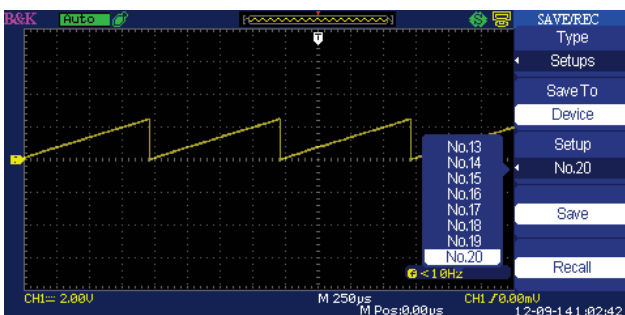


Minimize debug time by saving and recalling setups and waveforms from internal memory. Save and recall up to 20 different oscilloscope setups and 20 different waveforms.

### Digital filtering

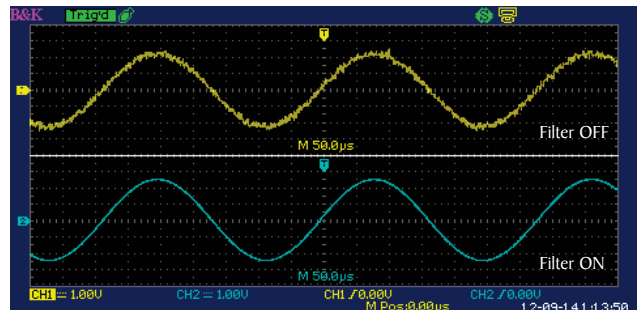


Filter out unwanted signal components such as various types of noise with built-in digital filters. Choose from Low-Pass, High-Pass, Band-Pass, and Band-Stop filters.

### Delayed sweep/zoom

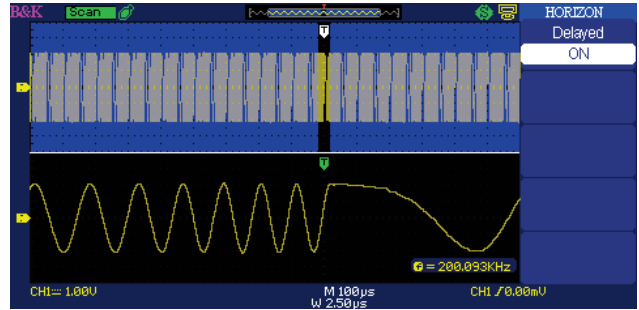

Use the oscilloscope's delayed sweep feature to zoom in a particular area of a signal in real time while viewing the entire captured waveform simultaneously.

### Pass/Fail testing

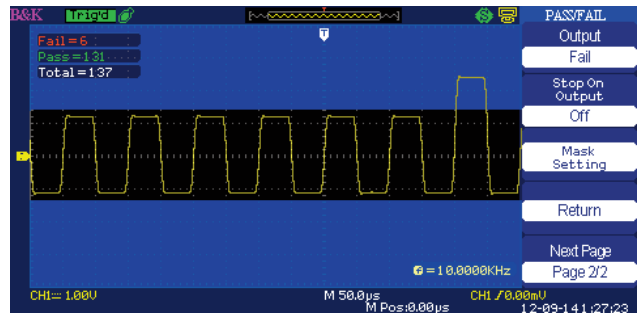

Generate user-defined pass/fail limits to quickly identify go/no go test results.



## PC connectivity



The included EasyScope software provides seamless integration between the oscilloscope and PC. Capture and transfer waveforms, screen images, setups and measurement results to a Windows PC via the USB device port on the back of the instrument. A USB host port on the front and rear allows for quick and easy screen saving.

## High bandwidth passive oscilloscope probes



PR150B



PR250B & PR500B

Avoid limiting the bandwidth of your measurement system. All 2550 series models come standard with high bandwidth, slimline passive probes (one per channel) to help you get the most out of your scope.

### Features

- Slim, stylish body
- Snap-locking sprung hook
- Easily replaceable tip
- Large accessory set
- Meets IEC 61010-031 CATII
- RoHS compliant

Model	Included Probes
2553	four 150 MHz bandwidth, x1/x10 probes (model PR150B)
2555	four 150 MHz bandwidth, x1/x10 probes (model PR150B)
2556	two 250 MHz bandwidth, x10 probes (model PR250B)
2557	four 250 MHz bandwidth, x10 probes (model PR250B)
2558	two 500 MHz bandwidth, x10 probes (model PR500B)
2559	four 500 MHz bandwidth, x10 probes (model PR500B)

## Digital Storage Oscilloscopes

Models 2553, 2555, 2556, 2557, 2558, and 2559

Specifications	2553	2555	2556	2557	2558	2559
<b>Performance Characteristics</b>						
Bandwidth	70 MHz	100 MHz	200 MHz		300 MHz	
Real Time Sampling Rate	2 GSa/s (half-channel interleaved) <sup>(1)</sup> , 1 GSa/s (per channel)					
Channels	4		2	4	2	4
Rise Time	< 5 ns	< 3.5 ns	< 1.8 ns		< 1.2 ns	
Ch to Ch Isolation (Both channels in same V/div setting)	> 100:1 at 35 MHz	> 100:1 at 50 MHz	> 100:1 at 100 MHz		> 100:1 at 150 MHz	
Max Memory Depth	24 kpts (half-channel interleaved) <sup>(1)(2)</sup> , 12 kpts (per channel)					
Vertical Resolution	8 bit					
Vertical Sensitivity	2 mV/div - 10 V/div (1-2-5 order)					
DC Gain Accuracy	< ±3.0%: 5 mV/div to 5 V/div in fixed gain ranges < ±4.0%: 2 mV/div in variable gain ranges					
Maximum Input Voltage	400 V (DC+AC PK-PK, 1 MΩ input impedance, X10), CAT I, 5 Vrms (50 Ω input impedance)					
Position Range	2 mV–100 mV: ±800 mV 102 mV – 5 V: ±40 V					
Bandwidth Limit	20 MHz ±40% (Note: BW limited below 20 MHz when using probe in X1)					
Horizontal Scan Range	5 ns/div – 50 s/div	2.5 ns/div – 50 s/div			1 ns/div – 50 s/div	
Timebase Accuracy	± 100 ppm measured over 1 ms interval					
Input Coupling	AC, DC, GND					
Input Impedance	1 MΩ ± 2%    13 pF ± 3 pF		1 MΩ ± 2%    13 pF ± 3 pF, 50 Ω ± 2%			
Vertical and Horizontal Zoom	Vertically or horizontally expand or compress a live or stopped waveform					
<b>I/O Interface</b>						
USB	Front and rear USB host ports support USB flash drives, USBTMC compliant USB device port for connecting to PC					
LAN	Supports SCPI commands for remote control					
Pass/Fail	Pass/Fail output					
<b>Acquisition Modes</b>						
Sampling	Display sample data only					
Peak Detect	Capture the maximum and minimum values of a signal					
Average	Waveform averaged, selectable from 4, 16, 32, 64, 128, 256					
<b>Trigger System</b>						
Trigger Types	Edge, Pulse Width, Video*, Slope, Alternative *Support signal Formats: PAL/SECAM, NTSC Trigger condition: odd field, even field, all lines, or line number					
Trigger Modes	Auto, Normal, Single					
Trigger Coupling	AC, DC, LF reject, HF reject					
Trigger Source	CH1, CH2, CH3, CH4, EXT, EXT/5, AC Line					
Pulse Width Trigger	Trigger Modes: Positive Pulse (>, <, =), Negative Pulse (>, <, =)					
Slope Trigger	Positive slope (>, <, =), Negative slope (>, <, =) Time: 20 ns-10 s					
Alternate Trigger	CH1 trigger type: Edge, Pulse, Video, Slope CH2 trigger type: Edge, Pulse, Video, Slope CH3 trigger type: Edge, Pulse, Video, Slope CH4 trigger type: Edge, Pulse, Video, Slope					

**Notes:**

(1) On 4-Ch models, Ch1 and Ch2 are interleaved, and Ch3 and Ch4 are interleaved. Half channel operation means that only Ch1 or Ch2 and/or only Ch3 or Ch4 is active.

(2) When timebase is 25 ns or faster and maximum data depth mode is enabled.

## Digital Storage Oscilloscopes

Models 2553, 2555, 2556, 2557, 2558, and 2559

Specifications	2553	2555	2556	2557	2558	2559
<b>Hardware Frequency Counter</b>						
Reading Resolution	6 digits					
Accuracy	± 0.01%					
Range	DC couple, 10 Hz to MAX bandwidth					
Signal Types	Satisfying all trigger signals (except pulse width trigger and video trigger)					
<b>Waveform Math and Measure</b>						
Math Operation	Add, Subtract, Multiply, Divide, FFT					
FFT	Window mode: Hanning, Hamming, Blackman, Rectangular Sampling points: 1024					
Measure	Vpp, Vmax, Vmin, Vamp, Vtop, Vbase, Vavg, Mean, Crms, Vrms, ROV, FOV, RPRE, FPPE, FREQ, Period, Rise Time, Fall Time, BWid, + Wid, - Wid, + Duty, - Duty, Phase, FRR, FRE, FFR, FFF, LRR, LRF, LFR, LFF					
<b>Cursors</b>						
Types	Voltage, Time					
Measurements	$\Delta V$ , $\Delta T$ , $1/\Delta T$ (frequency)					
<b>Display System</b>						
Display	7 in. Color TFT, 480 x 234 resolution, 64K color					
Display Contrast (Typical state)	150:1					
Backlight Intensity (Typical state)	300 nit					
Wave Display Range	8 x 18 div					
Wave Display Mode	Dots, Vector					
Persistence	Off, 1 sec, 2 sec, 5 sec, Infinite					
Menu Display	2 sec, 5 sec, 10 sec, 20 sec, Infinite					
Screen-Saver	Off, 1 min, 2 min, 5 min, 10 min, 15 min, 30 min, 1 hr, 2 hr, 5 hr					
Waveform Interpolation	Sin(x)/x, Linear					
Color Mode	Normal, Invert					
<b>Environmental and Safety</b>						
Temperature	Operating: 50° F to 104° F (10 °C to +40 °C) Not operating: -4 °F to 140 °F (-20 °C to +60 °C)					
Humidity	Operating: 85%RH, 104 °F (40 °C), 24 hours Not operating: 85%RH, 149 °F (65 °C), 24 hours					
Altitude	Operating: 9,842.5 ft (3,000 m) Not operating: 50,085.3 ft (15,266 m)					
Electromagnetic Compatibility	EMC Directive 2004/108/EC, EN61326:2006					
Safety	Low voltage directive 2006/95/EC, EN61010-1:2001					
<b>General</b>						
Power Requirements	100-240 VAC, CAT II, 50 VA max, 45 Hz to 440 Hz					
Dimensions (W x H x D)	14.1" x 6.14" x 4.65" (358 x 156 x 118 mm)					
Weight	4-channel models: Approx. 9.9 lbs (4.5 kg) 2-channel models: Approx. 9.5 lbs (4.3 kg)					
<b>Three-Year Warranty</b>						
Supplied Accessories	User manual, passive probes (one per channel), power cord, certificate of calibration, USB (Type A to B) communication cable					