

### FEATURES:

- Accepts Cable types RG55, 142

### MATERIALS:

Body and Fitting – Steel per QQ-S-764, Type 303.

Center Contact – Brass per QQ-B-626, Alloy 360, ½ Hard

Dielectric – Teflon per L-P-403

Gaskets and Seals – Silicone rubber per ZZ-R-765

### Finish:

Body and Fitting – Passivated steel

Center Contact – Gold plated per requirements of MIL-C-39012

### RATINGS:

Nominal Impedance: 50 Ohms

Frequency Range: DC to 18 GHz

### ORDERING INFORMATION: Model 4859


Cabling instructions furnished on request.

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm 0.02$ " (.51 mm), .xxx =  $\pm 0.005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

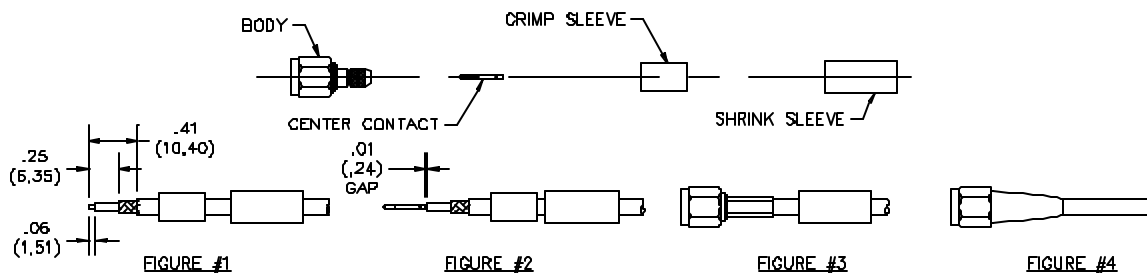

### FIGURE #1

- A. Slide shrink tubing and crimp sleeve over cable.
- B. Strip cable as shown.
- C. Flair braid outward slightly by rotating Dielectric.

### FIGURE #2

- D. Place center contact over center conductor provide gap as shown and solder.

### FIGURE #3

- E. Place connector body over contact, sliding barrel under braid.
- F. Push sleeve up against the body of the connector and crimp.

### FIGURE #4

- G. Push shrink tubing over crimped sleeve so it touches the connector body and shrink the sleeve using a heat gun or equivalent.

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm 0.02$ " (.51 mm), .xxx =  $\pm 0.005$ " (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies.