


Model 72933 Broadcast BNC Adapter Kit



Features:

- Kit includes the most frequently used 75 ohm adapters for Broadcast and other applications.
- All 19 adapters in kit are direct. **No intermediate couplers.**
- Reduced signal loss in adapters due to absence of couplers.
- Kit includes the most frequently used Broadcast adapters including BNC / BNC, BNC / F, BNC / RCA, BNC / Phono, and more. See complete list in table below.
- Rugged, lockable, pistol-grip case.
- All parts precision machined brass with tarnish resistant gold or nickel plating.
- Male center pins are gold plated brass.
- Female contacts are gold plated heat treated beryllium copper.
- Insulation material is PTFE.

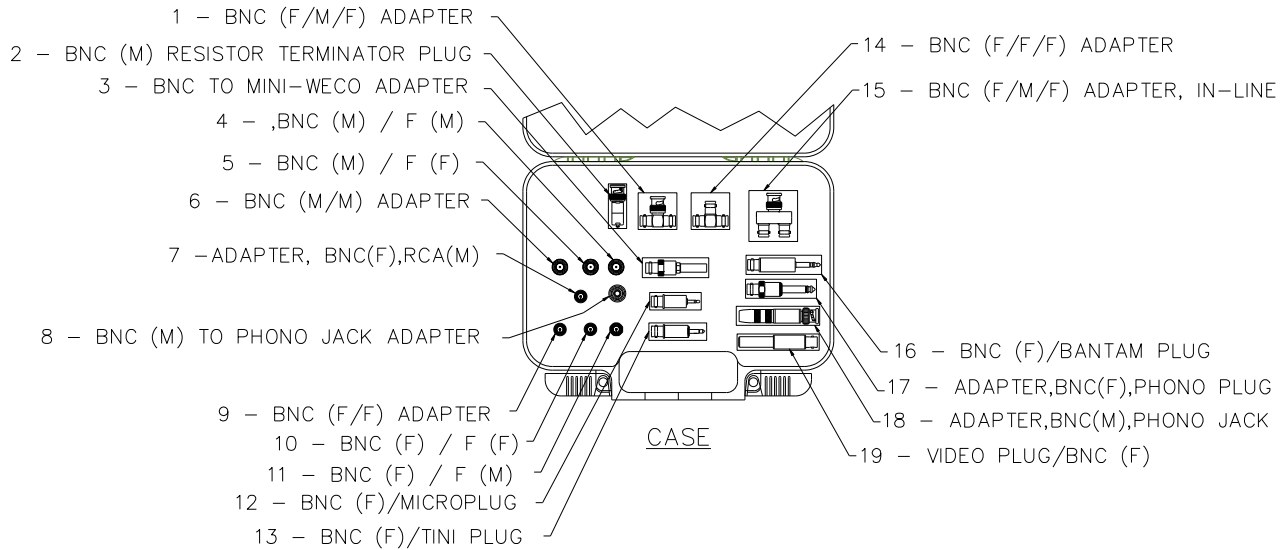

**Order Example: 72933
 (Broadcast BNC Adapter Kit)**

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.

Item	Description	Part Number	NOM. IMPEDANCE	FREQ. RANGE	VSWR	OPERATING TEMP
1	BNC female/male/female ADAPTER	6739	75 Ohm	DC to 4 GHz	1.35	- 65 to +165 C
2	BNC male RESISTOR TERMINATOR PLUG	3840-75	75 Ohm	DC to 500 MHz	1.35	Specified 0° to 70° C. Derates up to 150° C
3	BNC TO MINI-WECO ADAPTER	6519	75 Ohm	DC to 1 GHz	1.35	- 65 to +165 C
4	BNC male F male	6782	75 Ohm	DC to 1.5 GHz	1.50	- 40 to +149 F
5	BNC male F female	6779	75 Ohms	DC to 1.5 GHz	1.50	- 40 to +149 F
6	BNC male/male ADAPTER	6740	75 Ohm	DC to 3 GHz	1.35	- 65 to +155 C
7	BNC female RCA male	5319	50 Ohm	NS	NS	- 65 to +155 C
8	BNC male TO PHONO JACK ADAPTER	4054	75 Ohm	DC to 1.5 GHz	1.35	- 65 to +165 C
9	BNC female/female ADAPTER	6737	75 Ohm	DC to 3.000 MHz	1.35	- 65 to +155 C
10	BNC female F female	6780	75 Ohm	DC to 1.5 GHz	1.50	- 40 to +149 F
11	BNC female F male	6781	75 Ohm	DC to 1.5 GHz	1.50	- 40 to +149 F
12	BNC female/MICROPLUG	4267	50 Ohm	NS	NS	- 65 to +155 C
13	BNC female TINI PLUG	3837	50 Ohm	NS	NS	- 65 to +155 C
14	BNC female/female/female ADAPTER	6738	75 Ohm	DC to 3 GHz	1.35	- 65 to +155 C
15	BNC female/male/female ADAPTER	6754	75 Ohm	DC to 3 GHz	1.35	- 65 to +165 C
16	BNC female BANTAM PLUG	4719A	50 Ohm	NS	NS	122° F max
17	ADAPTER, BNC f, PHONO PLUG	1297	50 Ohm	NS	NS	125° C max
18	ADAPTER, BNC male PHONO JACK	4043	50 Ohm	NS	NS	125° C max
19	VIDEO PLUG BNC female	5008	75 Ohm	NS	NS	102° C max

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Distribuido Por:

www.finaltest.com.mx

Calle del Ebanó #16625

Tijuana B.C. Mexico

Tel. (664)681-1130

Tel. 01800 027-4848

ventas@final-test.net