



HIOKI

3661-20 OPTICAL POWER METER 3662-20, 3663-20 LASER LIGHT SOURCE

Field measuring instruments



Reliable Testing of Optical Power Loss



ISO14001
JQA-E-90091



<http://www.hioki.co.jp/>


HIOKI company overview, new products, environmental considerations and other information are available on our website.

3661-20
includes
Memory
&
USB^{1.1}
Interface

Quickly collect data and process it later on a computer

Features of 3661-20

- Simple and intuitive operation**
 Large LCD shows measurement results and memory data at a glance
 Ergonomic key layout
- Large Memory**
 Store up to 1000 data for each wavelength: 850 / 1310 / 1550 nm
- Effective data processing**
 USB interface and supplied application software allows easy data management on a computer

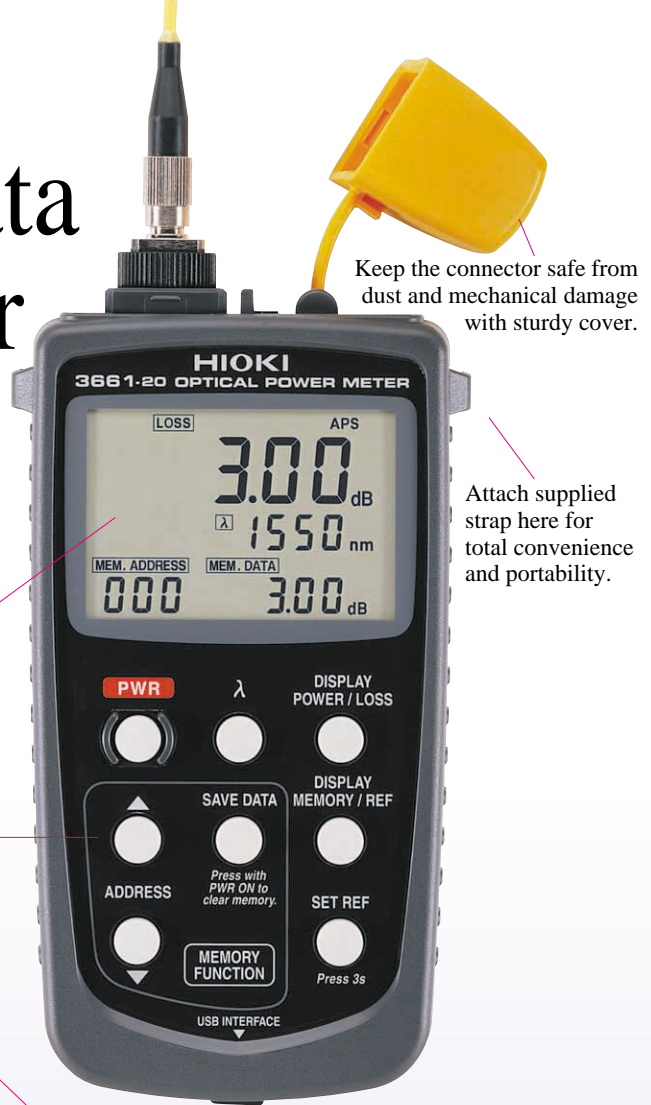



Keep the connector safe from dust and mechanical damage with sturdy cover.

Attach supplied strap here for total convenience and portability.

Optical Loss measurement

After obtaining an optical power value to be used as reference, the measurement result is compared to this reference and the loss is automatically shown on the display.


- Step 1**
 Connect light source to 3661-20 with short reference cable (about 2 m).
- Step 2**
 Select wavelength to be measured according to light source.
- Step 3**
 Switch to POWER display to measure optical power received from light source. Store this as reference value.
- Step 4**
 Connect light source and 3661-20 to both ends of cable to be measured.
- Step 5**
 Switch to the LOSS display to measure power loss. Store the results in memory.



Attach connector cover here to prevent dust from accumulating on the connector.



Top view of 3661-20

Mount optional FC or SC connector here.

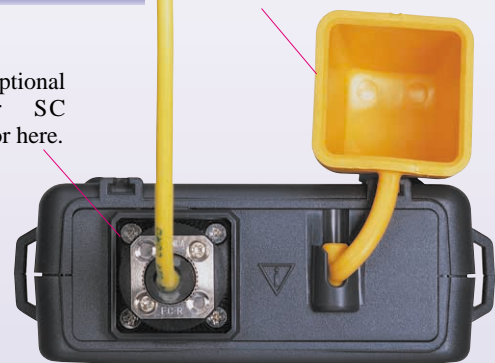

Optical Power measurement

Easily measure absolute value of input optical power. Save results in memory.





Two types of laser light sources

3662-20: 1550 nm
3663-20: 1310 nm



Features of 3662-20 / 3663-20

- ❑ Compact size for easy handling
Dimensions: approx. 76 (W) × 159 (H, including cover) × 35 (D) mm
Mass: approx. 180 g (without batteries)
- ❑ Continuous or modulated light output
Continuous wave (CW) output or 3 types of modulated light output (270 Hz, 1 kHz, 2 kHz) can be selected.

Top view of 3662-20

Mount optional FC or SC connector here.



Attach connector cover here to prevent dust from accumulating on the connector.

Hand strap

Transfer up to 1000 data for each wavelength

To PC




USB connector with dust cover




Use supplied USB cable

Saved data collected with the 3661-20 in the field can be downloaded to a computer via the USB interface. The data are in CSV format, suitable for further processing with spreadsheet software.



Supplied data transfer software



Specifications of supplied data transfer software DOWNLOAD UTILITY

- Operating environment: Windows 98, Me, 2000, and XP. CPU, RAM and display requirements follow the specifications of the respective operating system. At least 10 Mbytes of free hard disk space are required.
- Function: Download measurement data stored in memory to a computer via USB cable connection.
- File format: CSV
- Interface standard: USB Ver. 1.1 or later

Example of data imported into Excel

HIOKI3661DATA.csv										
1 HIOKI 3661 Measurement Data										
2 Comment: 1550, 1310, 850										
3 3661 Serial No. 102100003										
4 Wave Length Data										
5 1550nm 10										
6 1310nm 257										
7 850nm 100										
8										
9										
10	Address No.	1550nm	1310nm	850nm						
11		Power[dBm]	Loss[dB]	Reference[dBm]	Power[dBm]	Loss[dB]	Reference[dBm]	Power[dBm]	Loss[dB]	Reference[dBm]
	0				-52.29				1.57	-44.68
	989	978			-53.05					
	990	979			-52.86					
	991	980			-52.86				11.49	-31.67
	992	981			-52.77					
	993	982			-52.77					
	994	983			-52.78					
	995	984			-52.72					
	996	985			-52.7					
	997	986			-52.73					
	998	987			-52.76					
	999	988			-52.68					
	1000	989			-52.73					
	1001	990	5.26	-46.81	-52.69				11.6	-31.67
	1002	991	5.22	-46.81	-52.72					
	1003	992	5.24	-46.81	-52.71					
	1004	993	5.18	-46.81	-52.64					
	1005	994	5.27	-46.81	-52.67					
	1006	995	5.35	-46.81	-52.76					
	1007	996	0.16	-59.81	-52.57					
	1008	997	0.08	-59.81	-52.63					

Related products



Install UTP Cables Properly

- ❑ Supports UTP up to CAT 5e
- ❑ WireMap & Cable length check
- ❑ Optional connection check capability

3660 LAN CABLE HiTESTER

3661-20 OPTICAL POWER METER Specifications

Specifications apply to temperature range 23 °C ±5 °C, HIOKI reference wavelength 1310 nm and 1550 nm*, power -10 dBm, CW, single mode fiber, FC master connector, PC finish

Measurement functions	Optical power measurement (dBm) Measure absolute value of input optical power Optical loss measurement (dB) Automatically compare measured power with previously input reference value to calculate and display loss
Calibration wavelength	850 nm, 1310 nm, 1550 nm
Range	-60 dBm to +9 dBm (auto range)
Accuracy(1310/1550 nm)	±0.22 dB (±5 %) at -10 dBm
Resolution	0.01 dBm (optical power), 0.01 dB (optical loss)
Rated max.	+10 dBm
Connector	FC, SC (using optional connector adapter)
Fiber type	Single mode, multi mode (core dia. 62.5 μm max. NA: 0.275 max.)
Light receiver	InGaAs (dia. 1 mm)
Display update rate	Approx. 3 times/s (approx. 350 ms)
Memory	Max. 1000 data per wavelength
Interface	USB (Ver. 1.1) Dedicated PC application software allows transfer of measurement data from the 3661-20 memory to a computer
Functions	Auto power save (after about 10 minutes of inactivity; defeatable) Settings backup (settings are automatically stored at power-off) Battery check (symbol appears when voltage drops below approx. 4 V)
Applicable standards	Safety: EN61010-1: 2001 Pollution degree 2 EMC: EN61326: 1997 +A1: 1998 +A2: 2001
Operation temp.	0 °C to 40 °C, 80 %rh or less, no condensation
Storage temp.	-10 °C to 50 °C, 80 %rh or less, no condensation
Power supply	LR6(AA) alkaline battery×4
Max. rated power	0.5 VA
Operating time	Approx. 40 hours (continuous use)
Dimensions and mass	Approx. 85 W ×192 H (including 36 mm cover) × 35 D mm, Approx. 300g (without batteries) (Approx. 3.35"(W) 7.56"(H) 1.38"(D), Approx. 10.6 oz.)

3661-20 OPTICAL POWER METER

Includes Data transfer software DOWNLOAD UTILITY CD-R, USB cable (1m), 3853 CARRYING CASE (for 3661-20 main unit), Strap

For optical fiber cable measurement with the 3661-20, an optional connector adapter must be selected.

3661-20 options



9731 FC CONNECTOR ADAPTER



9732 SC CONNECTOR ADAPTER

3662-20, 3663-20 options



9733 FC CONNECTOR ADAPTER



9734 SC CONNECTOR ADAPTER

3661-20, 3662-20, 3663-20 common options



9730 CARRYING CASE
(Holds 3661-20, 3662-20 and 3663-20)



9735 FC-FC OPTICAL FIBER CABLE
9736 SC-SC OPTICAL FIBER CABLE
9737 SC-FC OPTICAL FIBER CABLE
(1.3 μm-band single-mode optical fiber cable, 2 m)



9738 OPTICAL CONNECTOR CLEANER



9739 SPARE CLEANER
(30 m × 6 rolls set)

3662-20, 3663-20 LASER LIGHT SOURCE Specifications

Specifications apply to temperature range 23 °C ±5 °C, single mode fiber, FC master connector, PC finish, at output end of 2m cable

Light-emitting element	Semiconductor laser diode
Output connector	FC, SC (using optional connector adapter)
Fiber type	Single mode
Output mode	Continuous wave (CW) or modulated light (270 Hz, 1 kHz, 2 kHz)
Output wavelength	1310 ±20 nm (3663-20) 1550 ±20 nm (3662-20)
Spectrum width	5 nm max.
Output level	-6 ±2 dBm
Output level stability	Within ±0.1 dB (temperature constant, 5 minutes) Within 1.0 dB p-p (ambient temperature 0 to 40 °C, 8 hours)
Functions	Battery check (indicator flashes when battery voltage drops)
Applicable standards	Safety: EN61010-1: 2001 Pollution degree 2 EMC: EN61326: 1997 +A1: 1998 +A2: 2001 Laser: IEC 60825 -1: 2001, Class 1 Laser Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No.50, dated July 26,2001.
Operation temp.	0 °C to 40 °C, 80 %rh or less, no condensation
Storage temp.	-10 °C to 50 °C, 80 %rh or less, no condensation
Power supply	LR6(AA) alkaline battery×2
Max. rated power	0.6 VA
Operating time	Approx. 20 hours (3662-20, continuous CW output) Approx. 36 hours (3663-20, continuous CW output)
Dimensions and mass	Approx. 76 W ×159 H (including 36 mm cover) × 35 D mm, Approx. 180g (without batteries) (Approx. 3.00"(W) 6.26"(H) 1.38"(D), Approx. 6.35 oz.)

* HIOKI reference wavelength

The calibration wavelength is a value inherent to the light source used for adjustment and calibration purposes. Normally, the sensitivity of a light receiver will be wavelength dependent, and there will also be individual tolerances. The output of the laser light source used for adjustment and calibration purposes will have the inherent wavelength of the source. For reasons related to continued equipment maintenance, it is not possible to specify a constant value for this wavelength. In order to avoid ambiguity when stating measurement accuracy, we therefore use the expression "HIOKI reference wavelength".

3662-20 LASER LIGHT SOURCE (1550 nm)

3663-20 LASER LIGHT SOURCE (1310 nm)

Includes hand strap, carrying case (for 3662-20, 3663-20 main unit) with both models

The 3662-20 and 3663-20 are Class 1 Laser products conforming to IEC 60825-1: 2001. **CLASS 1 LASER PRODUCT**

For optical fiber cable measurement with the 3662-20 and 3663-20, an optional connector adapter must be selected.

HIOKI

HIOKI E. E. CORPORATION

HEAD OFFICE :

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 / FAX +81-268-28-0568
E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :

6 Corporate Drive, Cranbury, NJ 08512 USA
TEL +1-609-409-9109 / FAX +1-609-409-9108
E-mail: hioki@hiokiusa.com

Shanghai Representative Office :
1704 Shanghai Times Square Office
93 Huaihai Zhong Road
Shanghai, 200021, P.R.China
TEL +86-21-6391-0090/ 0092
FAX +86-21-6391-0360
hioki-sh@81890.net

DISTRIBUTED BY

FINAL TEST^{MR}

Venta de Instrumentos de Prueba y Medición

Calle del Ebano #16625
Jardines de Chapultepec
Tijuana B.C. Mexico
Tel. (664) 681 1130
Fax. (664) 681 1150
Tel. 01800 027-4848
www.finaltest.com.mx