
# Pomona®

# Model BNC-C BNC Male To Male Cable Assembly

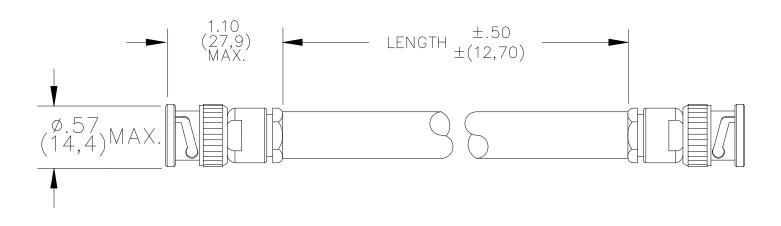

Part No.	Cable Type	Capacitance PF/ft.	Nominal Impedance	Cable Color	Cable O. D.
BNC-C-XX	RG58C/U	30.8	50 Ohms	Black	0.195"

#### **MATERIALS:**

BNC Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass Dielectric: PTFE

## **RATINGS:**

Operating Voltage: Shield-Earth: 33VRMS/70VDC Max Inner Conductor/Shield: 500VRMS Max Operating Temperature: +80°C (+176°F) Max Nominal Impedance: 50 Ohms

## **ORDERING INFORMATION:** Model BNC-C-XX

XX = Cable Length in inches, length tolerance:  $\pm 0.5$ " Standard Lengths: 18", 24", 36", 48", 60" Upon request, other lengths may be quoted.

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

Distribuido Por: www.finaltest.com.mx Calle del Ebano #16625 Tijuana B.C. Mexico Tel. (664)681-1130 Tel. 01800 027-4848 ventas@final-test.net

