


Models 72905
Clip lead for Micro SMD Grabber

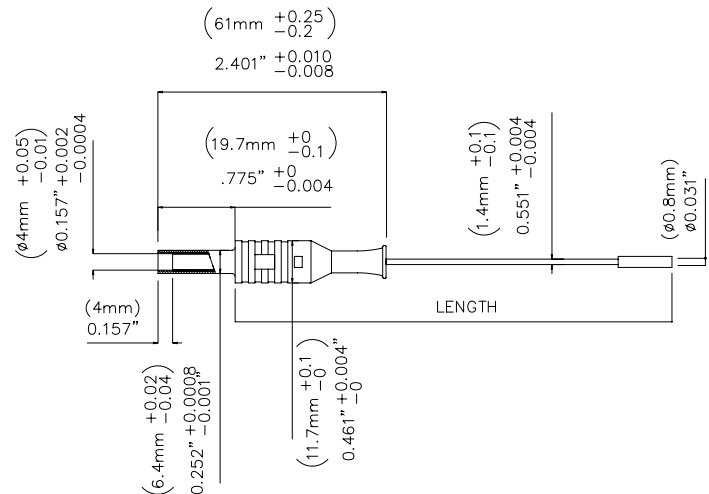

Attach your Micro SMD Grabber to Standard test leads.

Features

- Clip lead for easy attachment of Micro SMD Grabbers Pomona 72902 and 72906 to standard test leads
- 0.8mm female/4mm female

Materials

- Connector Body is Nickel plated Brass.
- Connector insulation is Polypropylene
- 0.8mm Socket is Gold over Nickel plated Brass.
- Insulation of 0.8mm is Elastomere
- Wire is Silicone.

Ordering Information

Model: 72905-Color
Available colors: Black (-0), Red (-2)

Distribuido Por:
www.finaltest.com.mx
Calle del Eban #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net



Specifications

Max Current	Max. 2A
Max Voltage	33 V AC / 70 V DC
Temperature Range	-20° C + 80° C
Max Resistance	Less than 8 mΩ

Rating: *hands free testing* in controlled environment: 70Vrms max. For CE compliance: Not intended for hand-held use at voltages above 33Vrms/70Vdc

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.