


# Passive Voltage Probes

## P3010 • P6101B • P6111B Data Sheet

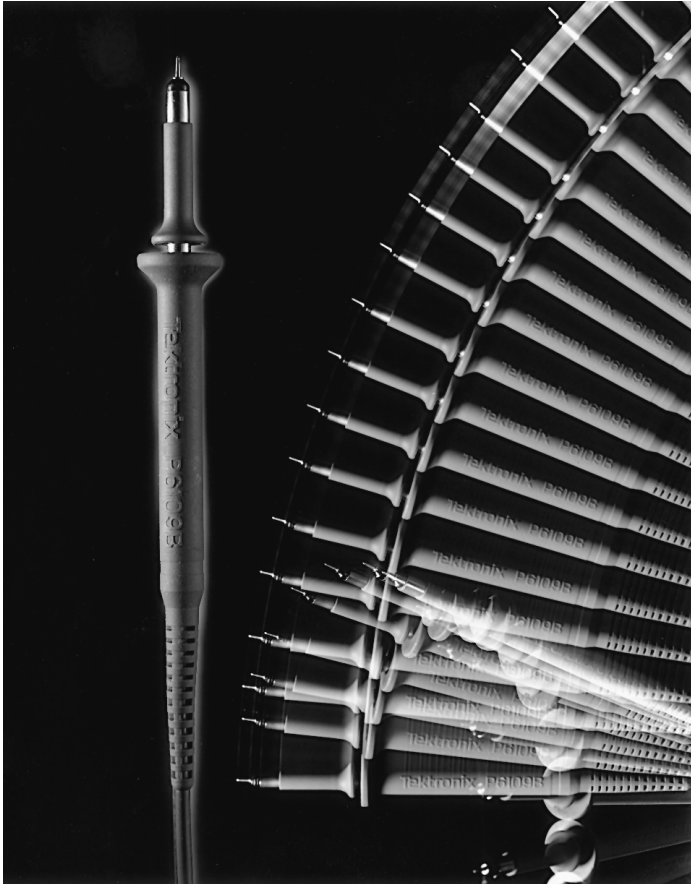

### Features & Benefits

- 1 M $\Omega$  Inputs
- P6101B
  - 1X, 15 MHz, 300 V CAT I
- P6111B
  - 10X, 200 MHz, 300 V CAT II
  - Readout
- P3010
  - 10X, 100 MHz (P3010)
- Molded Passive Voltage Probes
- Single Piece, Molded Rubber Body
- Lightweight Ergonomic Design
- 10-times Improvement in Durability
- HYBRID/SMT Circuitry on Multilayer Circuit Board for Improved Performance and Reliability
- New Stronger, Replaceable Probe Tip
- Safety Certification
  - UL3111-2-031, CSA1010.2.031, EN61010-2-031, IEC61010-2-031
- 1-year Unconditional Guarantee
- Miniature Probe Tip Compatible with a Wide Range of Tektronix Accessories and Adapters

### Applications

- Mixture of High, Medium, and Low-frequency General-purpose Relative Measurements
  - Engineering and Design
  - Service
  - Manufacturing

## Data Sheet

Passive voltage probes are the most commonly used oscilloscope probe. Other specialty probes expand the range and functionality of an oscilloscope as a measurement system, but a general-purpose, passive voltage probe is the working end of the oscilloscope, a tool used every day by engineers and technicians.

Two years of customer research, design innovation, and an exhaustive test program resulted in a most remarkable family of oscilloscope probes. This family of passive voltage probes is specifically designed for Tektronix analog and digital portable oscilloscopes. The 1X and 10X switchable probes combine the same high-quality electrical performance that customers expect from Tektronix with a new rugged mechanical design.

These probes are encased in a resilient, molded rubber body that is virtually indestructible. They are lighter in weight, more comfortable to hold, and more reliable than modular probe styles. The probes' replaceable tips are designed to withstand up to 20 pounds of force. Patented integral strain relief allows complete freedom of movement while providing superior cable flex. Each probe has received UL safety certification and meets MIL-T-28800, Class 3, environment specifications – something portable scope users will appreciate.


The P3010, P6101B, and P6111B probes are designed to complement the Tektronix family of portable DSO and ART instruments. The core of each probe's performance is supplied by a Tektronix HYBRID/SMT device.

The instrumentation experience possessed by Tektronix provides an extra margin of quality and reliability to the molded probes that is not commonly available to probe manufacturers. These molded probes have been designed and tested to support the overall system performance and measurement quality that Tektronix oscilloscopes guarantee.

Through the introduction of the molded probes, Tektronix has set a new standard for passive voltage probe styling, performance, and durability.



P3010.

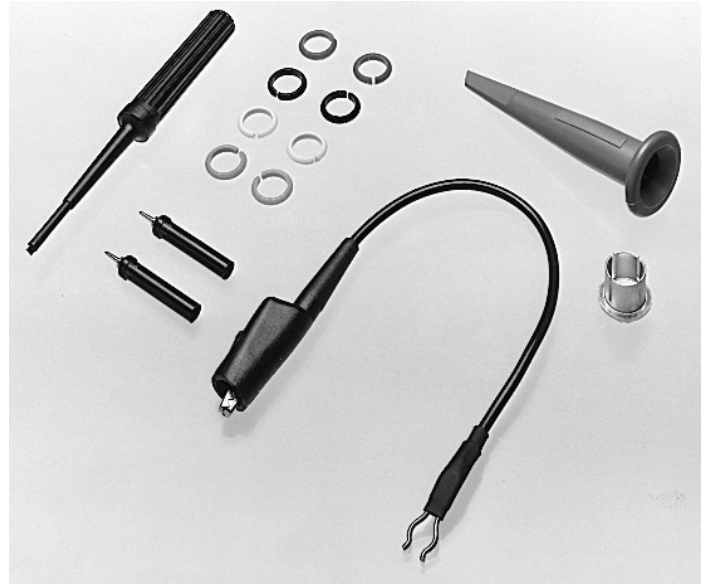

Standard Accessories.

## Characteristics

Type	Attenuation	Bandwidth (MHz)	Comp. Range (pF)	System Input Resistance (M $\Omega$ )	Typical Input C (pF)	Input RMS (Volts)	Readout	Scope/Product
P6101B	1X	15	NA	1	100	300 V <sub>RMS</sub> CAT I		All Scopes
P6111B	10X	200	15 to 35	10	14	400 V <sub>RMS</sub> CAT I 300 V <sub>RMS</sub> CAT II	X	TAS485, TDS350, TDS360
P3010	10X	100	10 to 15	10	13	400 V <sub>RMS</sub> CAT I 300 V <sub>RMS</sub> CAT II	X	TDS3012, TDS3012B, TDS3014, TDS3014B

## Ordering Information

### P6101B

1X, 15 MHz Passive Voltage Probe.

**Includes:** 4 pairs of colored cable markers, retractable hook tip, 6 in. ground lead, 2 replacement probe tips, BNC to probe tip adapter, adjustment tool, storage pouch, instruction manual (070-7819-07).

### P6111B

10X, 200 MHz Passive Voltage Probe.

**Includes:** Same as P6101B except instruction manual (070-8543-05).

**Includes:** Same as P6112 except instruction manual (070-9729-00).

### P3010

10X, 100 MHz Passive Voltage Probe.

**Includes:** Same as P6101B except instruction manual (071-0466-00).

### Recommended Accessories

See 5 mm Probe Accessories (miniature) probe system.



Product(s) are manufactured in ISO registered facilities.

**Contact Tektronix:**

**ASEAN / Australasia** (65) 6356 3900  
**Austria** 00800 2255 4835\*  
**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Belgium** 00800 2255 4835\*  
**Brazil** +55 (11) 3759 7600  
**Canada** 1 800 833 9200  
**Central East Europe, Ukraine, and the Baltics** +41 52 675 3777  
**Central Europe & Greece** +41 52 675 3777  
**Denmark** +45 80 88 1401  
**Finland** +41 52 675 3777  
**France** 00800 2255 4835\*  
**Germany** 00800 2255 4835\*  
**Hong Kong** 400 820 5835  
**India** 000 800 650 1835  
**Italy** 00800 2255 4835\*  
**Japan** 81 (3) 6714 3010  
**Luxembourg** +41 52 675 3777  
**Mexico, Central/South America & Caribbean** (52) 56 04 50 90  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**The Netherlands** 00800 2255 4835\*  
**Norway** 800 16098  
**People's Republic of China** 400 820 5835  
**Poland** +41 52 675 3777  
**Portugal** 80 08 12370  
**Republic of Korea** 001 800 8255 2835  
**Russia & CIS** +7 (495) 7484900  
**South Africa** +41 52 675 3777  
**Spain** 00800 2255 4835\*  
**Sweden** 00800 2255 4835\*  
**Switzerland** 00800 2255 4835\*  
**Taiwan** 886 (2) 2722 9622  
**United Kingdom & Ireland** 00800 2255 4835\*  
**USA** 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 25 May 2010

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tektronix.com](http://www.tektronix.com)



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

19 Oct 2010

51W-26153-0

