

Botron B5723 Technical Data Sheet



Overview:

Type CSA smooth top vinyl mats and runners designed to reduce strain from standing on hard surfaces. These soil resistant mats are 1/8" thick, available with or without 1/2" or 7/8" foam anti-fatigue backing. They exceed both EOS/ESD and Department of Defense requirements. Available in Black runners, and pre-cut floor mats with molded edges and grounding hardware.

FINAL TEST^{MR}

Venta de Instrumentos de Prueba y Medición

Calle del Ebanito #16625
Jardines de Chapultepec
Tijuana B.C. Mexico
Tel. (664) 681 1130
Fax. (664) 681 1150
Tel. 01800 027-4848
www.finaltest.com.mx


Product Notes and Features

- Energy Absorbing
- Reduces Strain
- Easy To Clean
- Long Lasting
- Non-Skid Backing
- Smooth Top Surface
- Lead-Free RoHS Compliant

PROPERTIES

SPECIFICATIONS

Material:	1/8" thick vinyl construction Available w/ Heavy Duty 1/2" or Super Duty 7/8" Thick Cushion Foam Backing
Meets Standards:	Dissipative Top Layer ANSI EOS/ESD S4.1 RTG Fed Std 101 Method 4046
Electricals:	Top layer <10 ⁶ RTT (Resistance Top to Top) 10 ⁵ - 10 ⁶ Ohms RTG (Resistance to Ground) 10 ⁵ - <10 ⁶ Ohms Charge Decay Time 5000 volts to 50v <0.01 Seconds
Colors:	Black

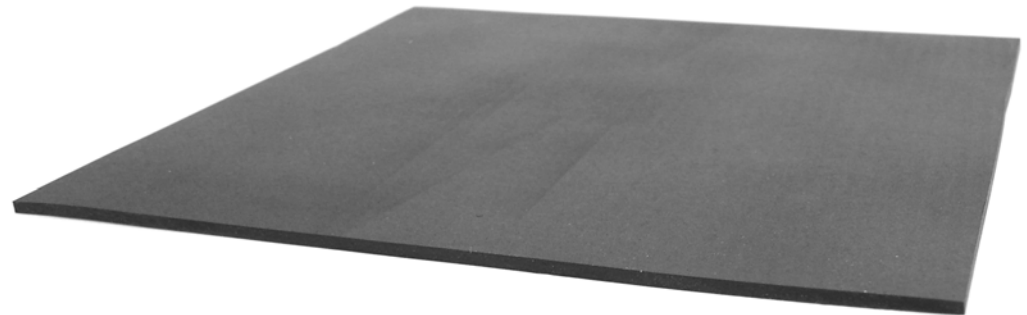

AVAILABLE APPLICATIONS

Standard 2' x 3' and 3 x 5 floor mats with ground
Standard 25', 50' and 75' vinyl runners
Heavy duty anti fatigue 1/2" thick 25', 50' and 75' runners
Heavy duty anti fatigue 1/2" thick 2' x 3' and 3 x 5 Floor
Mats with ground
Super duty anti fatigue 7/8" thick 25', 50' and 75' runners
Super duty anti fatigue 7/8" thick Anti-Fatigue 2' x 3' and
3 x 5 Floor Mats with ground

INSTALLATION

1. Unroll mat.
2. Attach 10' common point ground B9702 to 3/8" snap on mat.
3. Connect opposite end of wire to ground.
4. Check with your facility people for building ground.

TESTING GUIDELINES

Botron recommends testing ESD mats with the following test equipment: B8582, B8572, B8563, B8560, BSRM6, BSRM10.

Using two 5lbs. weights, placing them approximately 18" apart, conduct the test according to the test equipment which you are using.

Conduct this test to achieve a reading for RTG (resistance to ground) and RTT (resistance top to top) respectively.

When using the BSRM6 and BSRM10, simply place on top of surface of mat and hold down test button to achieve a surface resistance reading.

*Please note, it is recommended to read the testing guidelines provided with the ESD Tester you are using.

PART NUMBERS

Solid Vinyl:

B4323 2'x 3' 1/8" solid vinyl Smooth top mat with ground
B4335 2'x 5' 1/8" solid vinyl Smooth top mat with ground
B43325 3' x 25' 1/8" solid vinyl Smooth top mat runner
B43375 3' x 75' 1/8" solid vinyl Smooth top mat runner
B43475 4' x 75' 1/8" solid vinyl Smooth top mat runner

1/2" Heavy Duty (HD) Anti Fatigue:

B5723HD 2'x3' Smooth top anti fatigue mat with ground
B5735HD 3'x5' Smooth top anti fatigue mat with ground
B57325HD 3'x25' Smooth top anti fatigue runner
B57375HD 3'x75' Smooth top anti fatigue runner
B57475HD 4'x75' Smooth top anti fatigue runner

7/8" Super Duty (SD) Anti Fatigue:

B5723SD 2'x3' Smooth top anti fatigue mat with ground
B5735SD 3'x5' Smooth top anti fatigue mat with ground
B57325SD 3'x25' Smooth top anti fatigue runner
B57375SD 3'x75' Smooth top anti fatigue runner
B57475SD 4'x75' Smooth top anti fatigue runner

GROUNDING

All pre-cut mats come with attached snap and one B9701 floor mat ground. B9701 when properly setup will provide a grounded area for use with heel and toe grounds. For grounding rolls please see hardware (each mat will need a snap and ground to be effective).