Model 2382 & 2439 Single Insulated Miniature Binding Post

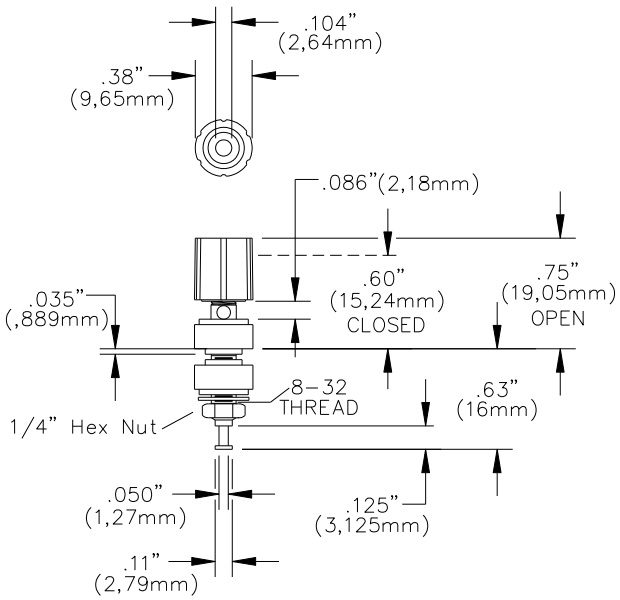



FEATURES:

- ✓ Gold or Tin Plated
- ✓ Panel Thickness .07 (1,78mm) to .170" (4,32mm)
- ✓ Accepts miniature banana plug, wire or spade lug..
- ✓ Hardware Included

MATERIALS:

Insulated Captive Thumb Nut;
Model: 2382, Gold Flash Brass;
Model 2439, Tin Plated Brass
Binding Post Body:
Model: 2382, Gold Plated Brass
Model: 2439, Tin Plated Brass
Solder Turret Terminal: – Gold Flash; 2439 - Tin
Model: 2382, Gold Flash Brass
Model 2439, Tin Plating Brass
Thumb Nut, Mounting Base and Insulator:
Polycarbonate.
Lock washer: Nickel Plated Steel
Hex Nut 1.4" #8-32: Nickel Plated Brass

RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 1500 Vrms maximum. *For CE compliance*: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.
Current: 5 Amperes
Operating Temperature: +115°C (+239°F) Max.

ORDERING INFORMATION:

Model 2382-**Color** (Gold)
Color = 0 (Black), 2 (Red), 3 (Orange), 5 (Green), 6 (Blue), 9 (White)

Model 2439-**Color** (Tin)
Color = 0 (Black), 1 (Brown), 2 (Red), 3 (Orange), 5 (Green), 6 (Blue), 9 (White)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Distribuido Por:
www.finaltest.com.mx
Calle del Ebano #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net

FINAL TEST
Venta de Instrumentos de Prueba y Medición