


**Model 3276 & 4513**  
**Miniature Banana Plug with Threaded Stud**

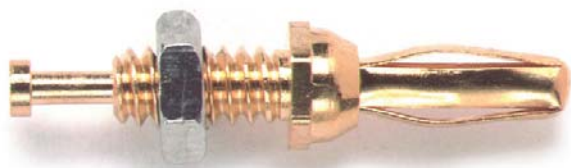

Model	"X" Dimension
<b>3276</b>	<b>.23" (5,8mm)</b>
<b>4513</b>	<b>.48" (12,2mm)</b>

Minimum Panel Thickness is 0.030" (0.76mm)

**Features**

- Threaded stud enables fast and easy mounting to panels.
- Solder turret allows wire attachment.
- Miniature banana plug features gold plated Beryllium Copper for long insertion life and low contact resistance.

**Materials**

Miniature Banana Plug:  
 Spring: Beryllium Copper, Gold Plated  
 Body: Brass, Gold Plated  
 Hex Nut: 4-40 Nut, Brass, Nickel Plated

**Ratings**

Operating Voltage: 2500 VDC  
 Current: 5 Amperes Max.

**Ordering Information**

Model 3276  
 Model 4513  
 Parts are packaged ten per bag, unassembled.

