
Pomona®

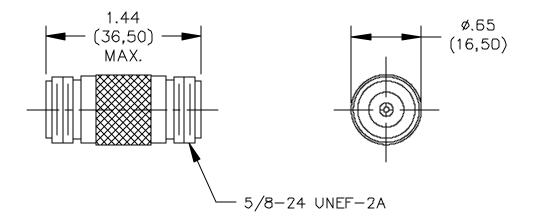

MATERIALS:

Body and Fittings – Brass, White Bronze Plating Center Contact – Gold Plated Beryllium Copper Connector meets the interface requirements of MIL-STD-348.

Finish:

Body and Fittings – White Bronze Plating Center Contact – Gold 30 microinches minimum over nickel 50 microinches.

RATINGS:

Operating Voltage: 1000 VRMS Nominal Impedance: 50 Ohms Dielectric – PTFE

ORDERING INFORMATION: Model 3841

All dimensions are in inches. Tolerances (except noted): $xx = \pm .02$ " (.51 mm), $xxx = \pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

