


## Model 4274

### Multi-Stacking Banana Plug Patch Cord with In-Line Fuse Holder

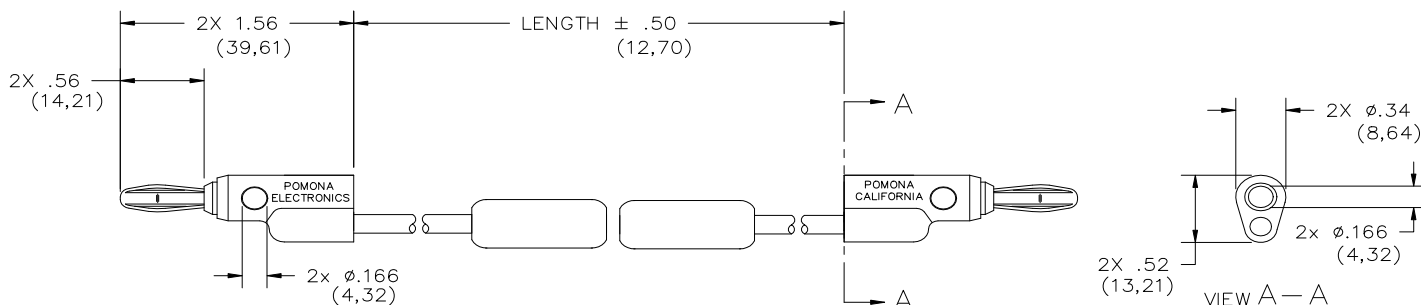

Model 4274  
Multi-Stacking Banana Plug Patch Cord  
with In-Line Fuse Holder

## Materials

Connector: Stacking Banana Plug:

Material: Brass body, Beryllium Copper spring, nickel plated.

Insulation: Polypropylene.

Wire: 18 AWG, 65 x 36 t.c., PVC insulated, 3.7 (.144)

O.D. Fuse holder, brass, tin plated.

Insulation: PVC. Accepts 6.4 (.25) dia. SFE and AGC fuses (not included).

## Specifications

Operating Temperature: +55°C (+131°F) Max.

Voltage:

For CE Compliance and for personal safety, do not hold in hand when voltages exceed 33Vrms/70Vdc.

Maximum voltage for *hands free use* in a controlled voltage environment: 5000 WVDC Max.

Current: 15 Amperes

## Ordering Information

Model: 4274-XX-\*

XX = Cable Lengths, Standard Lengths: 36" (914)

Additional lengths may be quoted upon request.

\* = Color, -0 Black, -2 Red

Ordering Example: 4274-36-2 Indicates 36" in length, color is Red.

## Features

- Provides protection from over current.
- Accepts standard .25 inch (6.4mm) diameter SFE and AGC fuses (fuse not included).
- Mates to Model #1581, 2854 or any standard banana jack.
- Vertical and cross stackable.