


Pomona®

Model 4294 Adapter, SMA Male To TNC Female

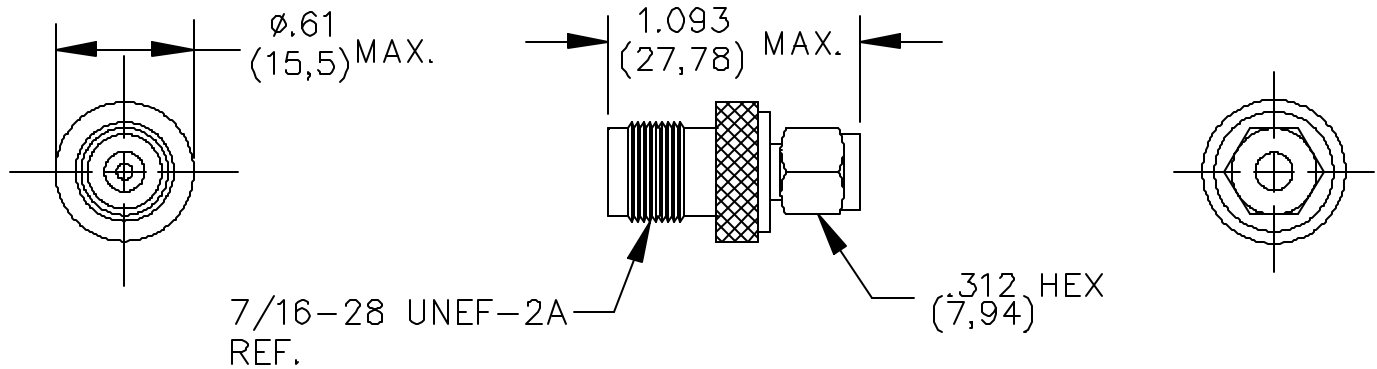

MATERIALS:

Body: Gold Plated Beryllium Copper,
Male Contact - Gold Plated Brass,
Female Contact - Gold Plated Beryllium Copper

Dielectric: Teflon per L-P-403

Finish: Body and Contacts - Gold plated per MIL-G-45204, Type II, Class 2

Marking: "Pomona 4294"

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 335VRMS Max.

Operating Temperature: -65°C (-85°F) to +165°C (+329°F)

Nominal Impedance: 50 Ohms

Frequency Range: 0-12.4 GHz.

ORDERING INFORMATION: Model 4294

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Distribuido Por:
www.finaltest.com.mx
Calle del Ebano #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net

FINAL TEST^{MR}
Venta de Instrumentos de Prueba y Medición