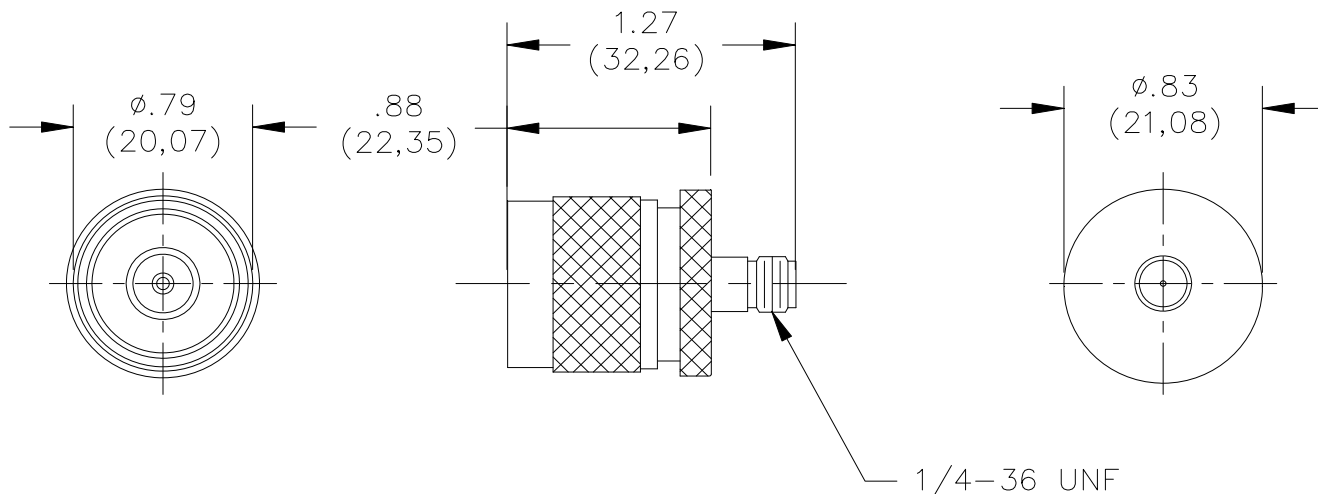


**Model 4297**  
**SMA (F) to Type N (M) Adapter****Materials**

Body: Gold Plated Beryllium Copper  
Male Contact – Gold Plated Brass  
Female Contact – Gold Plated Beryllium Copper  
Dielectric: PTFE per L-P-403  
Finish: Body and Contacts – Gold Plated per MIL-G-45204, Type II, Class 2  
Marking: "Pomona 4297"

**Ratings**

Operating Voltage:  
Shield/Earth: 30VAC/60VDC Max.  
Inner Conductor/Shield: 335VRMS Max.  
Operating Temperature:  
-65°C to +165°C (-85°F to +329°F)  
Nominal Impedance: 50 Ohms  
Frequency Range: 0 – 12.4 GHz

**Ordering Information**

Model: 4297

Distribuido Por:  
www.finaltest.com.mx  
Calle del Ebano #16625  
Tijuana B.C. Mexico  
Tel. (664)681-1130  
Tel. 01800 027-4848  
ventas@final-test.net

**FINAL TEST**  
Venta de Instrumentos de Prueba y Medición

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm.02$ " (.51 mm), .xxx =  $\pm.005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.