
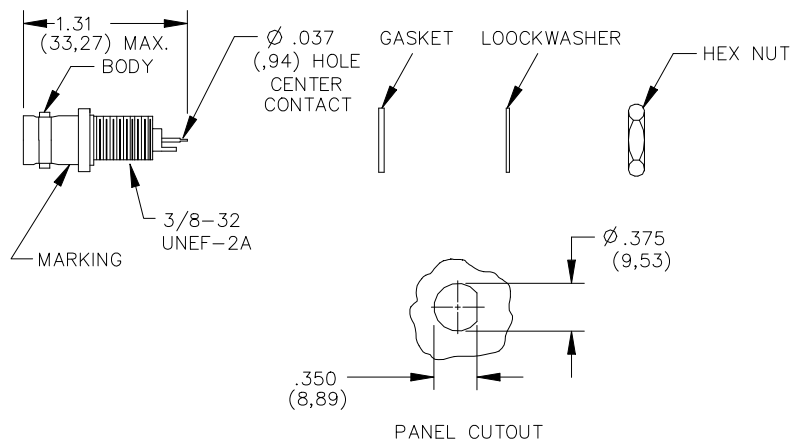


**Model 4388**  
**Triaxial BNC, Hermetic Sealed, Bulkhead Receptable**

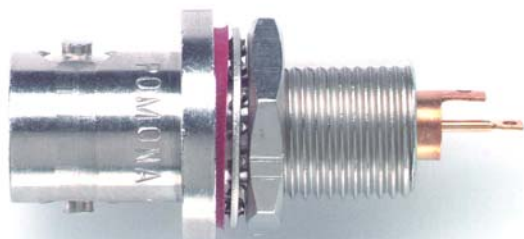

**Features**

- Mounts in panels up to 6.35mm (.25in)
- Hermetic Seal – 50 PSI differential pressure
- Leakage rate less than  $10^{-7}$  cc/sec of tracer gas at one atmosphere

**Materials**

Body and Fittings: Brass, Alloy 360, 1/2 Hard

Dielectric: PTFE

Center and Intermediate Contacts: Gold Plated Beryllium Copper, Cond. HT.or Brass per body.

Gasket: Silicone rubber per ZZ-R-765, Class 11, Grade 50.

Finish: Body and Fittings – Tarnish resistant.

Center and Intermediate Contacts – Gold plate per requirements of MIL-C-49142.

Marking: POMONA 4388

**Ratings**

Nominal Impedance: 50Ω  
 Operating Voltage: 500 Vrms  
 Frequency: DC to 500 MHz  
 Operating Temperature: -65°C to +165°C (-85°F to +329°F)  
 Insulation Resistance: 5000 MΩ

**Ordering Information**

Model: 4388

Distribuido Por:  
 www.finaltest.com.mx  
 Calle del Ebanó #16625  
 Tijuana B.C. Mexico  
 Tel. (664)681-1130  
 Tel. 01800 027-4848  
 ventas@final-test.net



All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.