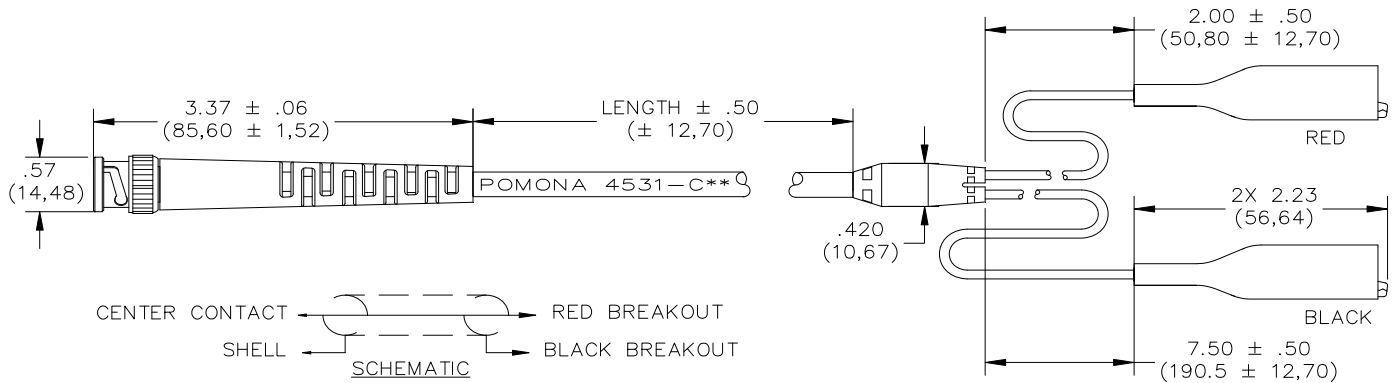


Model 4531
BNC (M) with Strain Relief to Alligator Clips**Features**

- BNC Cable breakouts to Insulated Alligator Test Clips for test versatility.
- BNC connector and breakout wires are molded directly to the cable for added pull strength.
- Alligators clip jaws open up to .300" (7,62mm) Max.
- Schematic: Black Alligator to BNC Shell, Red Alligator to BNC Center Contact.

Materials

BNC: Body – Brass, Nickel Plated
Center Pin – Brass, Gold Plated
Dielectric – PTFE
Impedance – 50 Ohms

Strain Relief and Molded Breakout: PVC, Color: Black

Breakout Wires: 20 AWG Stranding 41 x 36 t.c., PVC Insulated, .087" (2,21 mm) O.D., Color Matches Flex Boot Color

Molded Breakout: PVC molded to breakout leads and cable, Color: Black

Cable: RG58C/U, Capacitance: 30.8 pF/Ft., .195" (5,0mm) O.D. Nom., Marking: "POMONA ELECTRONICS 4531-C-XX"

Alligator Clip: Body – Steel, Nickel Plated
Spring – Stainless Steel
Flex Boot – Vinyl (Color: one Black, one Red)

**Ratings**

Operating Temperature: +50°C (+122°F) Max.

Operating Voltage: Maximum voltage for *hands free use*: 150 VAC Max.

Ordering Information

Model: 4531-C-XX

XX = Cable length in inches. Std. Lengths: 18" (45,72cm), 24" (60,96cm), 30" (76,20cm), 36" (91,44cm), 48" (121,92cm) & 60" (152,40cm)

Additional lengths can be quoted upon request.

Ordering Example: 4531-C-36, Cable length will be 36" (91,44cm) long.

Distribuido Por:
www.finaltest.com.mx
Calle del Ebano #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net

FINAL TEST
Venta de Instrumentos de Prueba y Medición

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.