
Pomona®

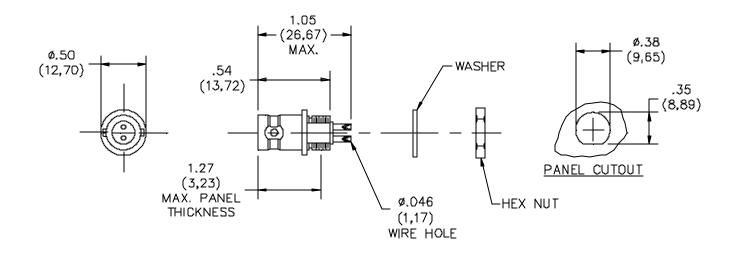

MATERIALS:

Body: Brass, Tarnish Resistant Plating Alloy 360, ¹/₂ Hard or Phosphor Bronze
Male Contact: Gold Plated Brass
Female Contact: Gold Plated Beryllium Copper
Dielectric: PTFE
Finish:
Body and Fittings: Tarnish resistant
Male and Female Contact – Gold plated
Marking: "POMONA 4958"

RATINGS:

Operating Temperature: -65°C (-85°F) to +165°C (+329°F) Operating Voltage: 500 VRMS Max. Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 4958

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.



