
## Pomona®

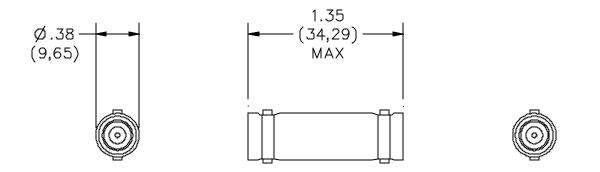

## **MATERIALS:**

Body/Fittings: Brass per QQ-B-626, Tarnish Resistant Plating, Alloy 360, <sup>1</sup>/<sub>2</sub> Hard
Center Contact: Gold Plated Beryllium Copper per QQ-C-530, Cond. H.T. & MIL-C-39012
Dielectric: PTFE
Marking: "POMONA ELECT. 5290"

## **RATINGS:**

Frequency Range: DC to 500 MHz.

## **ORDERING INFORMATION:** Model 5290

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm.02$ " (,51 mm),  $.xxx = \pm.005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

