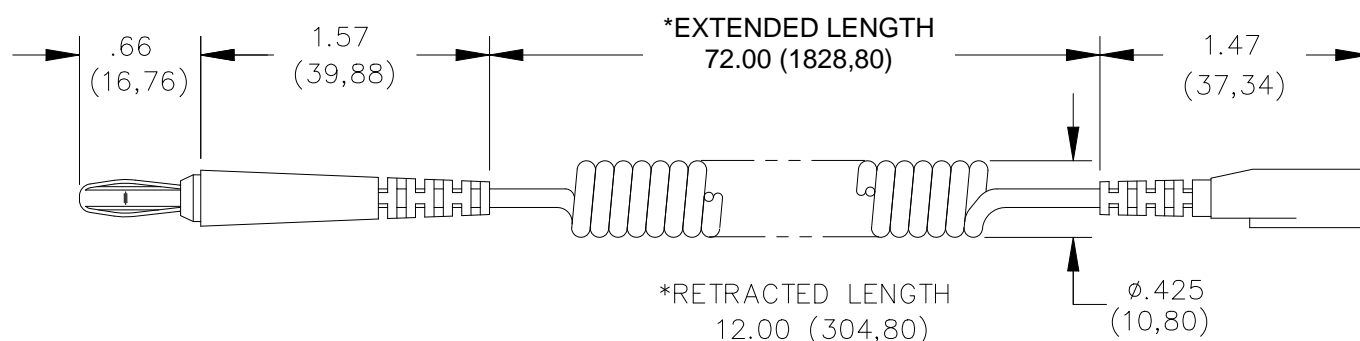


Model 5534
Static Control Ground Cord**Materials**

Connector: 1st End – Standard Banana Plug

Spring: Beryllium Copper Alloy QP2.0

Plug Body: Brass Alloy 87-75% Hard

Finish: Nickel-plated per QQ-N-290, Class 2, 150 microinches

Insulation: PVC, color: black

Coiled Cord – Coiled tinsel cord, 2 bundles, 7 tinsel of bare copper, Polyurethane jacket 2.25mm O.D.

Connector: 2nd End – 3.18 (1/8) Snap Receptacle – Brass

Finish: Nickel-plated

Insulation: PVC, color: black

Molded-In Resistor: 1 megohm \pm 10%, 1/4 Watt, Carbon Film

Ratings

Operating Temperature: +50°C (+122°F) Max

Ordering Information

Model: 5534

Static Control Ground Cord

Distribuido Por:
www.finaltest.com.mx
Calle del Eban #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net

FINAL TEST
Venta de Instrumentos de Prueba y Medición

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.