


1	RETRACTABLE HOOK TIP
2	BNC ADAPTER
3	I.C. ADAPTER
4	INSULATING TIP
5	TRIMMER TOOL
6	6" GROUND LEAD

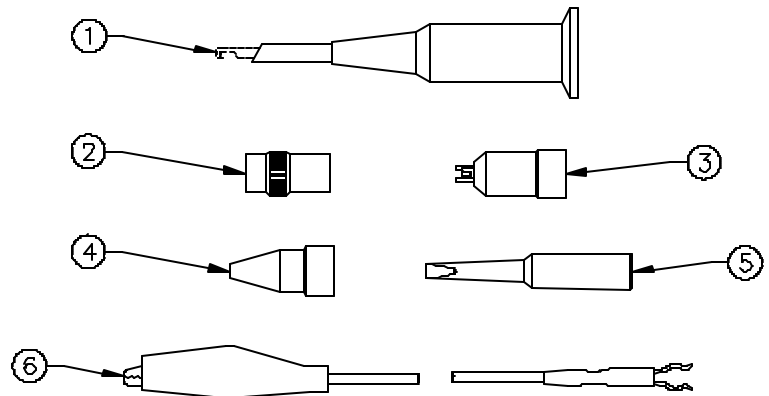

(Accessories are also included with each probe)

FEATURES:

- Sprung hook quickly attaches to the probe body and converts the tip to a hook for stronger test terminal retention.
- BNC adapter attaches to the probe tip base and converts the tip to a push-on BNC (male) for optimum shield protection.
- IC Tip Adapter attaches to the probe tip to allow single lead probing on through-hole DIP devices while preventing accidental adjacent pin shorting.
- Insulated tip offers additional insulation protection around the probe tip base area to prevent accidental shorting.
- Trimmer tool is used to match the frequency response of the probe to the oscilloscope.
- Six inch (152,4) ground lead reduces signal distortion and leading edge ringing.

ORDERING INFORMATION: Model: 6267

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Distribuido Por:
www.finaltest.com.mx
Calle del Ebano #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net

FINAL TEST^{MR}
Venta de Instrumentos de Prueba y Medición