

Features:

- ✓ Connectors are precision machined (not die-cast) from brass.
- ✓ Black nickel plating is applied for easily identification as a high definition connector.
- ✓ Insulator material is high density PTFE to maintain a perfect dielectric constant.
- ✓ Connectors utilize gold plated contact pin to maintain low return loss in high definition applications.
- ✓ Connector is precision matched to Belden® 1694A cable, a precision low loss serial digital video RG-6/U coax cable.
- ✓ video coax for analog and digital SDI/HDTV applications
- ✓ Connectors use standard commercial die set, size: 0.324"/0.255"/0.068" HEX and 0.052"/0.042" SQ (e.g. model 2657 or 2699 from Paladin Tools)

Materials:

Connector Body	Black nickel plated brass
Crimp Ferrule	Nickel plated annealed copper
Outer Contact	Nickel plated brass
Male Contact Pin	Gold plated brass
Insulator	Polytetrafluoroethylene (PTFE)

Ratings:

Impedance:	75 ohms
Frequency:	0 to 3 GHz.
VSWR:	1.3 max
Insertion Loss:	0.2 db (@ 3GHz.)
Leakage Loss:	-55 db (@ 3GHz.)
Contact Resistance:	3 Milliohms
Voltage	*500 V
Insulation Resistance:	5,000 Megohms
Insertions:	500 min.
Cable Retention:	60 lbs.
Temperature:	-55 to +199° C

*Hands free testing in controlled voltage environment; For CE compliance: not intended for hand held use at voltages above 33Vms/70 Vdc


All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Distribuido Por:
www.finaltest.com.mx
Calle del Ebano #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net


FINAL TEST
Venta de Instrumentos de Prueba y Medición




1. CUT CABLE END EVENLY AND PERPENDICULAR




2. SLIDE OUTER FERRULE OVER CABLE END.

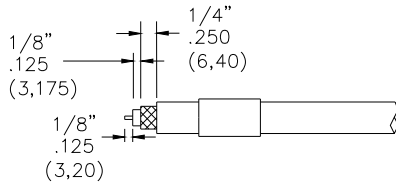


3. STRIP CABLE JACKET, BRAID, AND DIELECTRIC TO SPECIFICATION LENGTHS. (NOTE: FOIL AND BRAID CABLES SHOULD LEAVE FOIL TO END OF DIELECTRIC).




4. INSERT CONTACT PIN ONTO CABLE'S CENTER CONDUCTOR SO THAT IT IS FLUSH TO DIELECTRIC, CRIMP OR SOLDER CONTACT FIRMLY.




5. FLARE BRAID END SLIGHTLY.



6. INSERT PIN-END INTO CONNECTOR BODY AND PUSH UNTIL IT CLICKS INTO PLACE.



7. SLIDE OUTER FERRULE OVER BRAID AND UP AGAINST BODY ASSEMBLY.

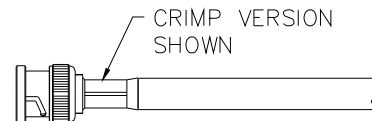

8. CRIMP OUTER FERRULE WITH APPROPRIATE CRIMP TOOL.

Use standard commercial die set, size: 0.324"/0.255"/0.068" HEX and 0.052"/0.042" SQ (e.g. model 2657 or 2699 from Paladin Tools)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Distribuido Por:

www.finaltest.com.mx

Calle del Ebano #16625

Tijuana B.C. Mexico

Tel. (664)681-1130

Tel. 01800 027-4848

ventas@final-test.net

FINAL TEST
Venta de Instrumentos de Prueba y Medición