

**Model 7073
BNC (F) Straight PCB Mount 50 Ω**



Model 7073 BNC (F) Straight PCB Mount 50 Ω

Use for secure attachment in 50 Ω PCB mount applications.

Features


- Convenient PCB mount configuration.
- Precision machined body with gold plated contacts.
- Insulation PTFE (not delrin).

Materials

- Body is machined brass with tarnish resistant nickel plating.
- Female center contacts are gold-plated heat treated beryllium copper.
- Body made from precision machined high quality brass (not die cast).
- High quality machined PTFE dielectric.

Ordering Information

Model: 7073 BNC (F) PCB Mount.

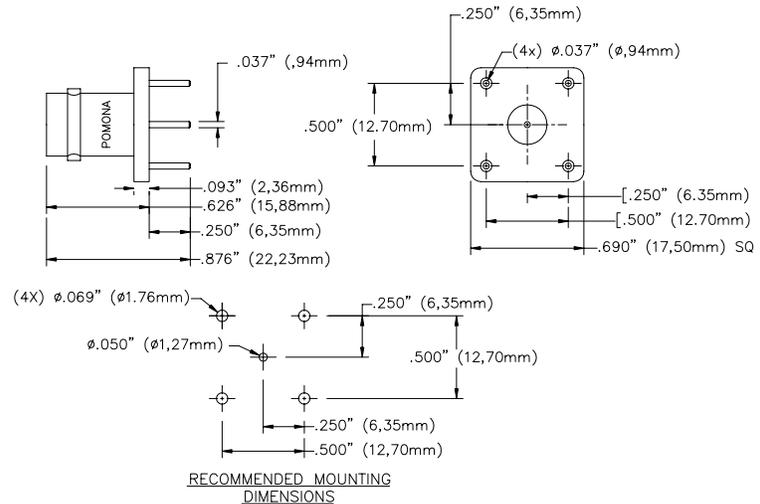

Specifications

Nominal impedance	50 Ω
Frequency	0-4 GHz
VSWR	1.30 max. 0-4 GHz
Center / Outer contact resistance	1.5 / 1.0 mΩ
Number of insertions	500
Insulation resistance	5000 MΩ (min)
Dielectric withstand voltage	1500 Vrms
Ratings: Voltage: 500 Vrms Operating temperature: -85° F to +131° F (-65 °C to +155 °C) Max.	