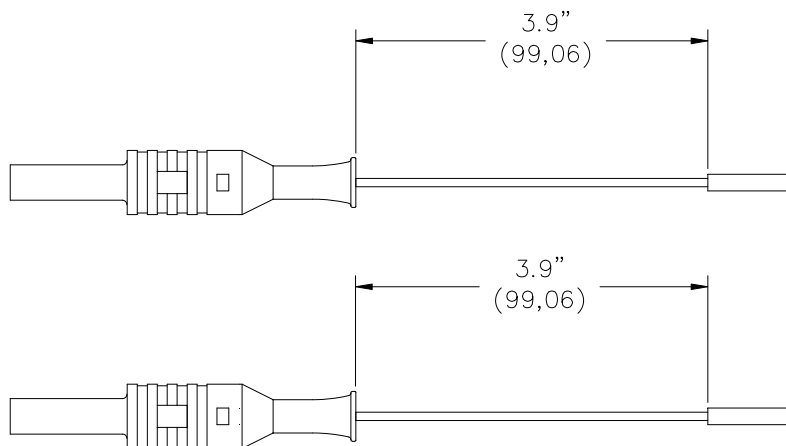


**Model 72936****2mm Sheathed Banana Plug to 4mm Sheathed Banana Plug****Features**

- Provides a quick and easy configuration between a 4mm sheathed banana jack to a 2mm sheathed banana jack.

**Materials**

2mm/4mm Banana Plugs:

*Body:* Nickel Plated Brass

*Spring:* Nickel Plated Beryllium Copper

Plug Insulation: Polypropylene, color per part number

Wire Insulation: PVC, color per part number

**Ratings**

Operating Voltage: For *CE Compliance* and for personal safety, do not hold in hand when voltages exceed 33 Vac/70 Vdc.

Do not use on circuits where transient stresses can exceed the rated voltage.

Operating Temperature: -20°C to +80°C (-4°F to +176°F) Max.

Operating Current: 2 Amperes Max.

**Ordering Information**

Model: 72936-XX-\*

XX = Standard Length: 39 (3.9in) (10cm)

\* = Standard Color: -0 Black, -2 Red

Ordering Example: 72936-39-2, Test Lead is 3.9in and Red.

Distribuido Por:  
www.finaltest.com.mx  
Calle del Ebanó #16625  
Tijuana B.C. México  
Tel. (664)681-1130  
Tel. 01800 027-4848  
ventas@final-test.net

**FINAL TEST**<sup>MR</sup>  
Venta de Instrumentos de Prueba y Medición

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.