


Model 73058
UHF Jack to Jack Adapter

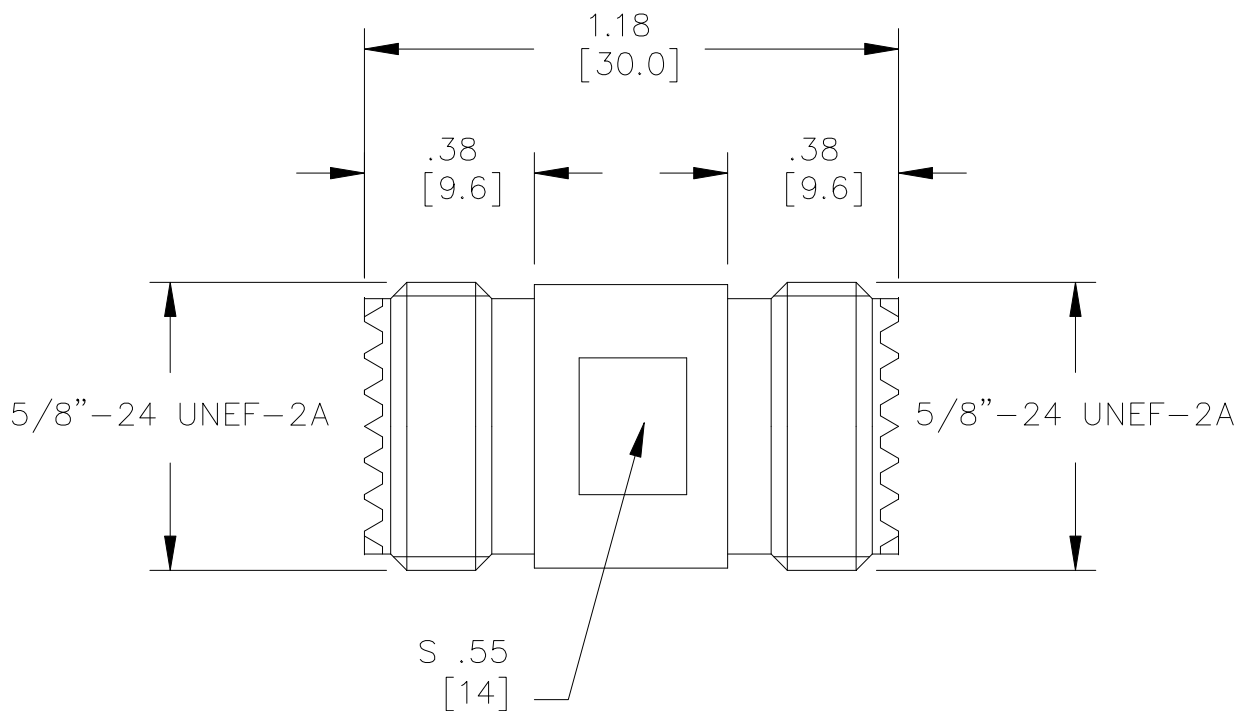

Model 73058
UHF Jack to Jack Adapter

Features

- DC – 300MHz bandwidth.
- Connectors are precision machined.

Materials

Center Conductor: Phosphor Bronze, Gold Plated
Connector Body: Brass, Nickel Plated
Insulators: PTFE

Specifications

Frequency Range: DC – 300MHz
Contact Resistance:
 Center Conductor: ≤1.0 mΩ
 Outer Conductor: ≤0.2 mΩ
Insulation Resistance: ≥ 300 MΩ
Dielectric Withstand Voltage: 750V
For CE compliance, do not hold in hand when voltages exceed 33 Vrms / 70 Vdc.
Number of Insertions: 500 cycles minimum

Ordering Information

Model: **73058**