


**Model 73075**

MCX Plug to MCX Plug, RG178B/U (50 Ohm), RG179B/U (75 Ohm)



*Model 73075-UU*  
MCX Plug to MCX Plug, RG178B/U, 50 Ohm

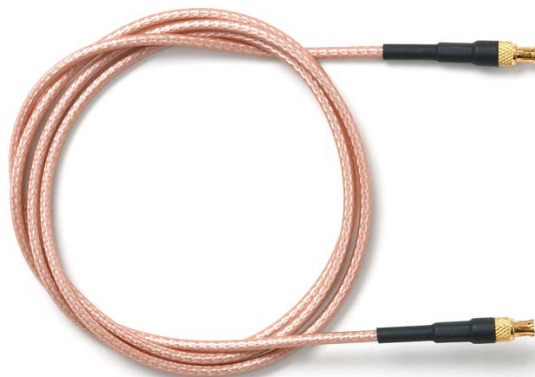

*Model 73075-VV*  
MCX Plug to MCX Plug, RG179B/U, 75 Ohm

Snap-on coupling and miniature size for fast connect and disconnect where space is limited

**Features**

- Small size and durability for confident connections.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connections are required.

**Materials**

MCX Male Connectors (50 Ohm):

- Center Contact: Phosphor Bronze, Gold Plated
- Connector Body: Brass, Gold Plated
- Crimp Ferrule: Copper, Nickel Plated
- Insulators: PTFE

MCX Male Connectors (75 Ohm):

- Center Contact: Phosphor Bronze, Gold Plated
- Connector Body: Brass, Gold Plated
- Crimp Ferrule: Copper, Nickel Plated
- Insulators: PTFE



**Specifications**

Cable Type	RG178B/U	RG179B/U
Impedance	50Ω	75Ω
Frequency Range	DC - 3GHz	DC – 1.5GHz
Capacitance per 1ft (0.305m)	29.0 pF	19.5 pF
Insulation Resistance	≥ 1000 MΩ	≥ 1000 MΩ
Insulator Withstand	750V	750V
Temperature Range	-55° C to +155°C (-67°F to +311°F)	-55° C to +155°C (-67°F to +311°F)
Jacket	FEP	FEP
Cable O.D. (inches)	0.071" (1.8mm))	0.100" (2.54mm)
Center Conductor (mm)	7 x .1 silver coated copper covered steel	7 x .1 silver coated copper covered steel

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

**Model 73075**

MCX Plug to MCX Plug, RG178B/U (50 Ohm), RG179B/U (75 Ohm)

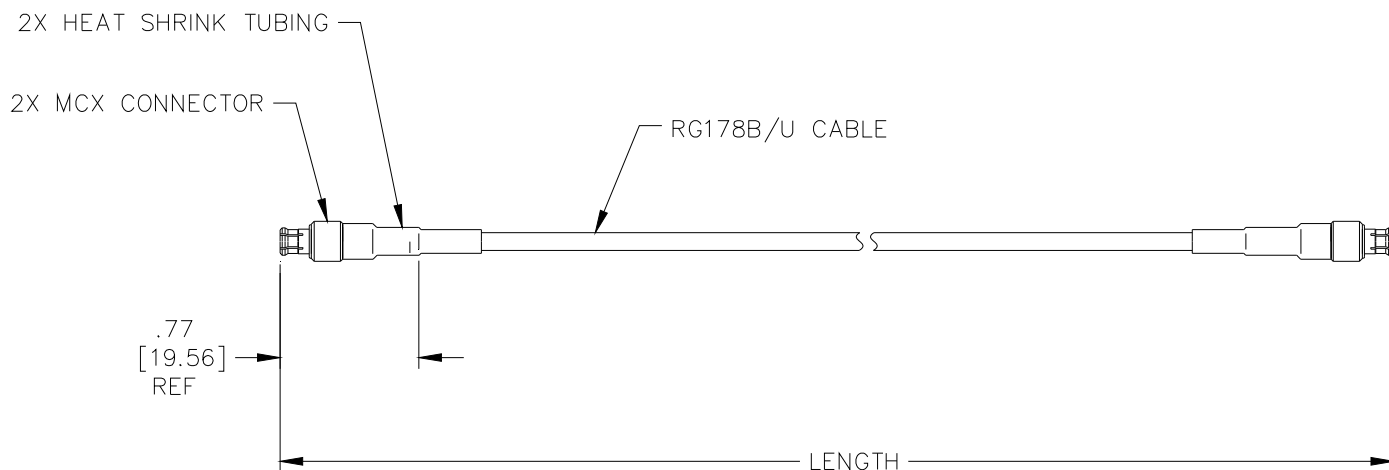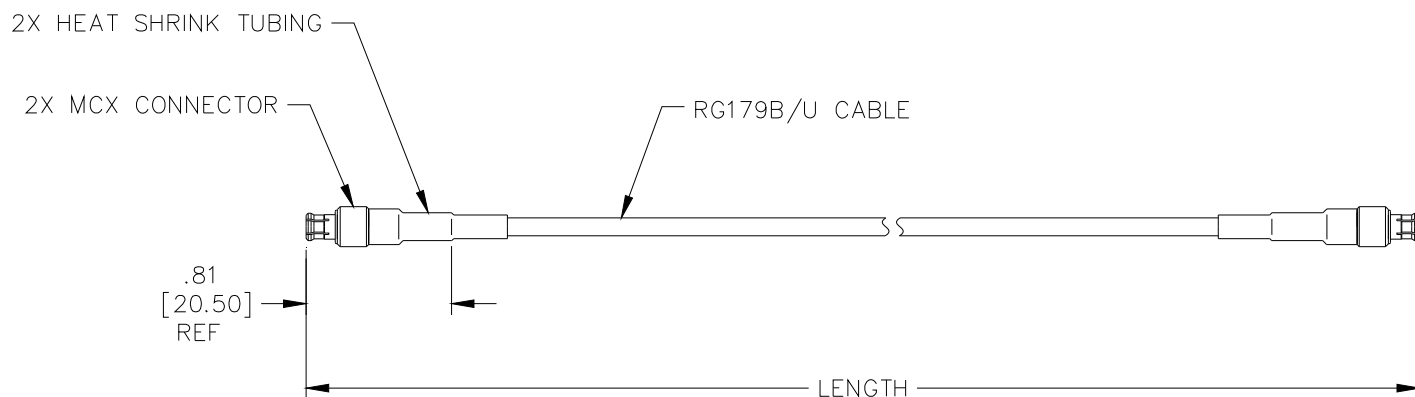

**Ordering Information**

Model: **73075**

Cable Designators: **UU** = RG178B/U, **VV** = RG179B/U

Standard Lengths: **12", 24", 36", 48"**

- 12" ± .157" (305mm ± 4mm)
- 24" ± .275" (610mm ± 7mm)
- 36" ± .394" (914mm ± 10mm)
- 48" ± .512" (1219mm ± 13mm)

Ordering Example: **73075-VV-48**, Cable is RG179B/U with length of 48" (1219mm)

Distribuido Por:  
www.finaltest.com.mx  
Calle del Ebano #16625  
Tijuana B.C. Mexico  
Tel. (664)681-1130  
Tel. 01800 027-4848  
ventas@final-test.net



All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.