


Model 73078

MMCX Plug to SMA Bulkhead Jack, RG178B/U

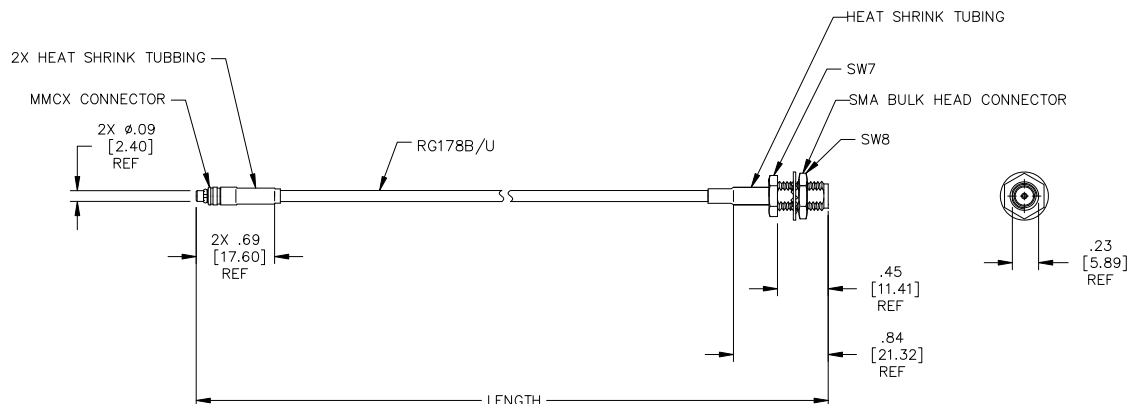

Model 73078
MMCX Plug to SMA Bulkhead Jack, RG178B/U

Small size, and durability for
confident connections

Materials

MMCX Male Connector:

Center Contact: Phosphor Bronze, Gold Plated
Connector Body: Brass, Gold Plated
Crimp Ferrule: Copper, Nickel Plated
Insulators: PTFE

SMA Female Connector:

Center Contact: Beryllium Copper, Gold Plated
Connector Body: Brass, Gold Plated
Crimp Ferrule: Copper, Nickel Plated
Insulators: PTFE

Features

- DC - 2GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connection are required.

Specifications

| | |
|------------------------------|--|
| Cable Type | RG178B/U |
| Impedance | 50Ω |
| Frequency Range | DC - 2GHz |
| Insulation Resistance | ≥ 500 MΩ |
| Insulator Withstand | 500V |
| Temperature Range | -55° C to +155°C (-67°F to +311°F) |
| Jacket | FEP |
| Cable O.D. | 0.071" (1.8mm) |
| Center Conductor (mm) | 7 x .1 silver coated copper covered steel |

Ordering Information

Model: **73078**

Cable Designator: **UU** = RG178B/U

Standard Lengths: **12", 24", 36", 48"**

- 12" ± .157" (305mm ± 4mm)
- 24" ± .275" (610mm ± 7mm)
- 36" ± .394" (914mm ± 10mm)
- 48" ± .512" (1219mm ± 13mm)

Ordering Example: **73078-UU-24**, Cable is RG178B/U with length of 24" (610mm)

Distribuido Por:
www.finaltest.com.mx
Calle del Ebano #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net

FINAL TEST
Venta de Instrumentos de Prueba y Medición

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.