


Model MDP-X Double Banana Plug, Four Terminal Isolation

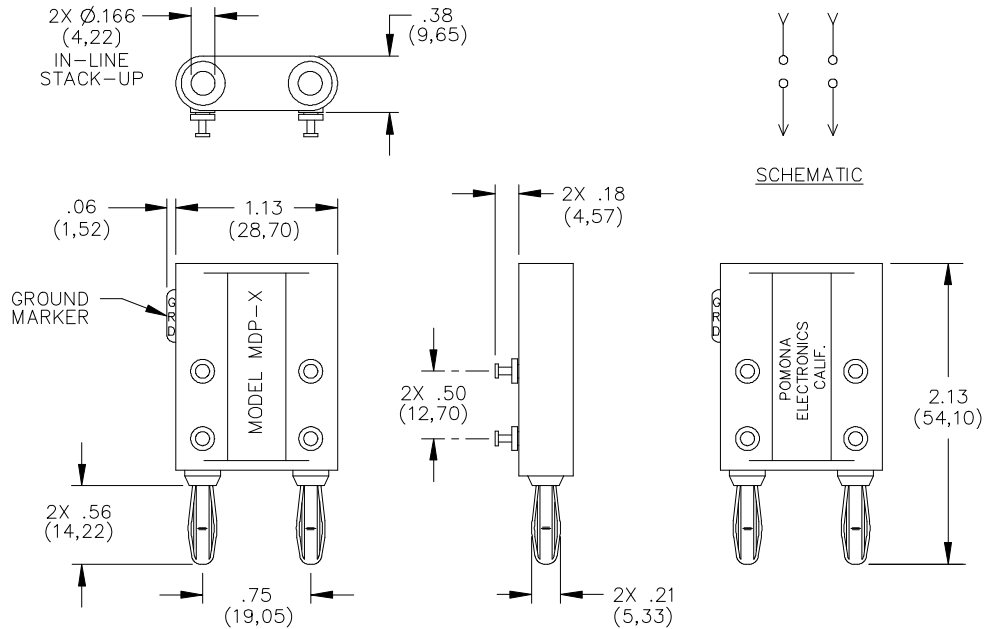

FEATURES:

- Mates to Model #2269 or any standard double banana jack..
- Provides four terminal isolation.
- Top stack-up receptacles isolated from lower plugs.
- Ideal for insertion of matching network in laboratory VTM's signal generators, etc.
- Bright tin plated solder turret terminals for permanent noise-free connections.

MATERIALS:

Upper Conn.:

Double Banana Jack

Material: Brass per QQ-B-626, Alloy 360,
½ Hard.

Finish: Nickel plated by QQ-N-290, Class 2,
200/300 microinches.

Insulation: Polypropylene molded to plug bodies.

Color: Red.

Marking: "POMONA ELECTRONICS CALIF.
MODEL MDP-X".

Lower Conn.:

Double Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Alloy 172, Cond. HT.

Plug body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2,
200/300 microinches.

Solder turret terminals

Material: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Bright tin plated per MIL-T-10727,
Type I, 100/250 microinches.

RATINGS:

Operating Temperature: +55°C. (+131°F.) MAX.

Operating Voltage: 2500 V

Current: 15 Amperes

ORDERING INFORMATION: Model MDP-X

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

Distribuido Por:

www.finaltest.com.mx

Calle del Ebano #16625

Tijuana B.C. Mexico

Tel. (664)681-1130

Tel. 01800 027-4848

ventas@final-test.net

FINAL TEST^{MR}
Venta de Instrumentos de Prueba y Medición