


Model 1658
Cable Assembly Type "N" Male Both Ends

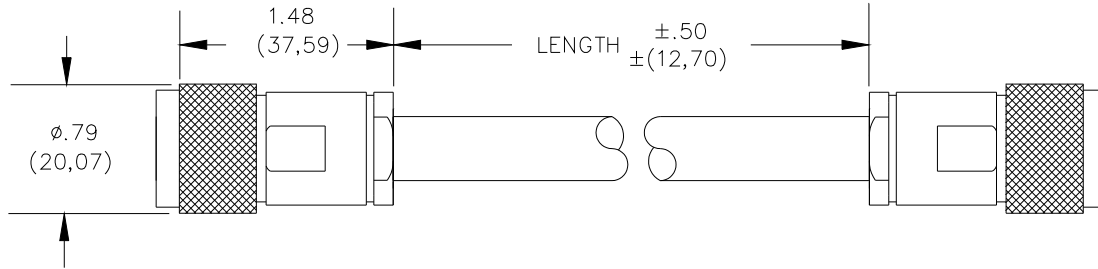

MATERIALS:

Conn: 1st end – Type "N" Male, See table above.
 Finish: Body and Fitting, Tarnish resistant.
 Center contact: Gold plated per requirement of MIL-C-39012.
 Nominal Impedance: 50 Ohms.
 Cable: See table above. Marking: "POMONA 1658-T-XX".
 Conn: 2nd end – Same as first end.

RATINGS:

Operating Voltage: 1000 VRMS Max.
 Operating Temperature: +89°C Max.

ORDERING INFORMATION: Model 1658-T-XX

XX = Cable Lengths, Standard Length: 18" (457), 24" (610), 36" (914), 48" (1219) & 60" (1542).

Additional lengths can be quoted upon request.

Ordering Example: 1658-T-24 Indicates 24" in length

Cable	
	RG214/U (Double Shield)
Model	1658-T-XX
Capacitance pf/ft	30.8
Nominal Impedance	50
Cable Diameter	$\phi .425$