
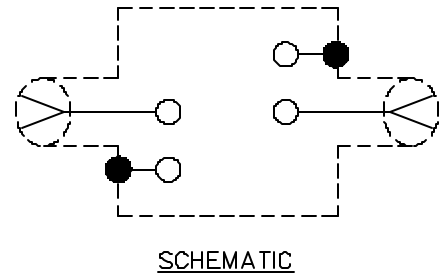
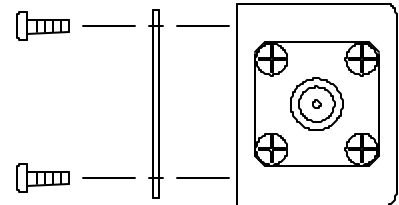


Pomona[®]

Model 2399 Size A Aluminum Box With Cover SMA Female/Female

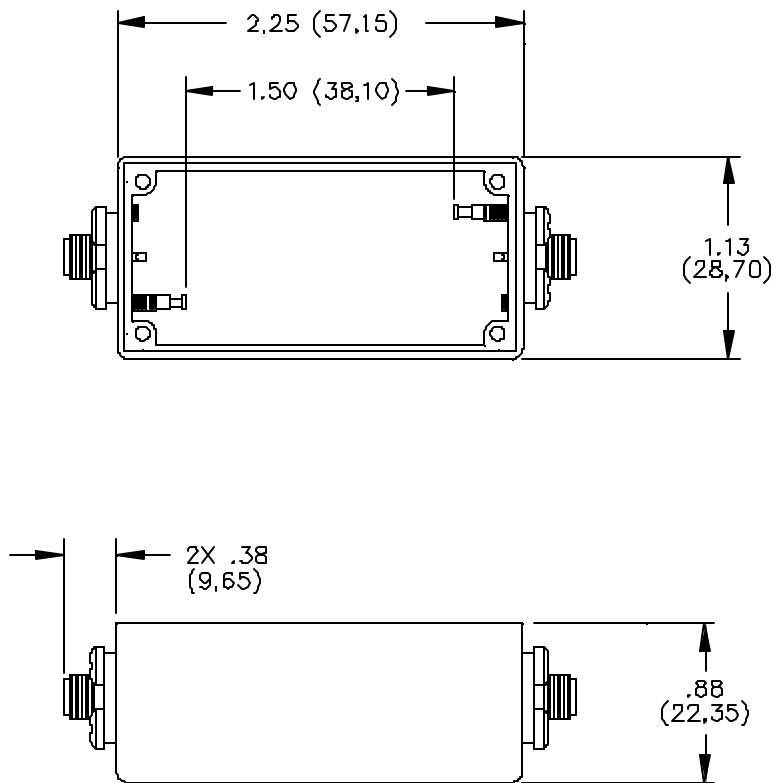

MATERIALS:

Connector: 2 ea. SMA Receptacle. Body: Tarnish Resistant Plating, Center Contact: Gold Plated Beryllium Copper
Solder Turret Terminal Screws: Steel
Shielded Housing: Die cast aluminum alloy A380 or A384.
Finish: Blue paint per Federal Standard 595 #25109 over Phosphoric Etch
Cover: .040 Thick aluminum alloy #1100-H14
Finish: Clear Anodized
Screws: Steel 4 ea. #2-32 x 1/4" Pan Head, self-tapping

RATINGS:

Operating Voltage: Inner conductor/Shield: 335 VRMS Max.
Operating Temperature: -55°C to +150°C
Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 2399

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Distribuido Por:
www.finaltest.com.mx
Calle del Ebano #16625
Tijuana B.C. Mexico
Tel. (664)681-1130
Tel. 01800 027-4848
ventas@final-test.net

FINAL TEST^{MR}
Venta de Instrumentos de Prueba y Medición