



Model 6106 DMM RF Detector Test Probe





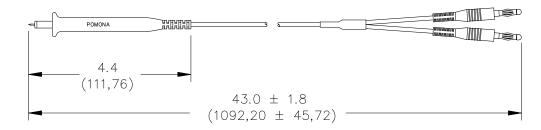

Model 6106 DMM RF Detector Test Probe

Features

- Display RF voltages on multimeters
- Based on the use of high reliability SMD components
- Narrow-body monolithic probe will measure AC voltages of sinusoidal wave shapes between 500Hz and 1GHz
- Works best on multimeters with $10M\Omega$ input impedance
- Conversion factor is 1 VDC for an input of 1 VRMS of the sine wave signal

Distribuido Por: www.finaltest.com.mx Calle del Ebano #16625 Tijuana B.C. Mexico Tel. (664)681-1130 Tel. 01800 027-4848



Materials

Scope Probe

Probe Tip: Body - Brass, Gold Plated

Insulation: Thermoplastic

Cable: RG 174/U

Banana Plug: Body – Brass, Nickel Plated Insulation: Thermoplastic, Black and Red

Specifications

Model Number	6106
	1MHz to 1GHz
Bandwidth	± 1.5dB
Peak AC Input	30V
DC Isolation Incl.	
Peak AC	100V
Turn-On Voltage	350mV
Input Capacitance	6pF
Cable Length	4ft (1.2m)

Ordering Information

Model: 6106

DMM RF Detector Test Probe

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.