


## **Model 72930**

### Panel Mount IEC 61010 4mm (0.16in) Jack for Sheathed Plugs



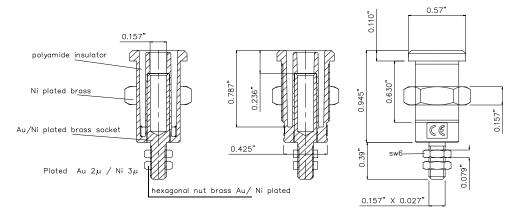

PANEL DRILLING Ø0.472'



Model 72930 Panel Mount IEC 61010 4mm (0.16in) Jack for Sheathed Plugs

#### **Materials**

Body: Polyamide

Hex Nut:Nickel-plated brassStud:Nickel-plated brassStud Hex Nuts:Nickel-plated brass

#### **Features**

- Panel mount IEC61010 4mm (0.16in) banana jack for sheathed banana plugs, with threaded stud.
- · Hexagonal nut.

# **Specifications**

Max Current	36A
Max Voltage	1000 V CAT III

M4 x 0.7 nut = Screwing Torque Nuts = 30 Ncm Max.

## **Ordering Information**

Model: 72930-\*

\*Available colors: 0=Black, 1=Brown, 2=Red, 4=Yellow, 5=Green, 6=Blue, 7=Violet, 8=Gray, 9=White Ordering example: 72930-5 (72930 with Green

Polyamide Insulation)

Each color sold in packages of 10 pieces.

Distribuido Por: www.finaltest.com.mx Calle del Ebano #16625 Tijuana B.C. Mexico Tel. (664)681-1130 Tel. 01800 027-4848 ventas@final-test.net



All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.