

Model 73084, 73085, 73086, 73088

Terminal Jacks, Male Threads 6-32, 8-32, 10-32, Female Threads 10-32

Features

- Adapter provides an easy and quick banana jack connection by replacing the screw in a terminal strip or control panel.
- Allows a standard sheathed or unsheathed banana plug / patch cord to securely connect to a terminal strip.
- Helps to avoid accidental arc-over by eliminating the usage of alligator clips, or test probe "slip offs" during measurement applications.
- Perfect for use with model 73087 jumper test lead sets in peer-checking system test sequences.
- For more information, please visit our "Articles" section on nuclear applications at www.pomonaelectronics.com.



Materials

Banana Jack: Nickel-plated Brass Insulation: Polypropylene V-2

Specifications

Voltage: 600 Vrms, Maximum voltage for *hands free use*.

For CE compliance, do not hold in hand when voltages exceed 33 Vrms / 70 Vdc

Current: 20 A

Operating Temperature: -10° C to +80° C (+14° F to 176° F)


Torque In/Lb.: **73084**: 7


73085: 20 **73086**: 20 **73088**: 16


Dimensions



Model 73086, 10-32 Female Terminal Jack







All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.






Model 73084, 73085, 73086, 73088

Terminal Jacks, Male Threads 6-32, 8-32, 10-32, Female Threads 10-32




Model 73084, 6-32 Male Terminal Jack

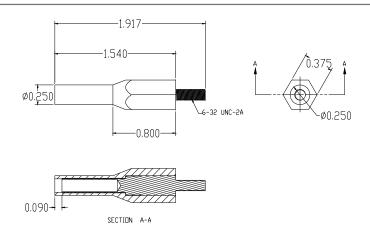




Model 73088, 8-32 Male Terminal Jack





Model 73085, 10-32 Male Terminal Jack



Ordering Information

Model: 73084, 73085, 73086, 73088

Standard Colors: -0 Black, -2 Red, -4 Yellow, -6 Blue

Ordering Example: 73084-2, (73084 terminal jack with Red insulation)

Distribuido Por: www.finaltest.com.mx Calle del Ebano #16625 Tijuana B.C. Mexico Tel. (664)681-1130 Tel. 01800 027-4848 ventas@final-test.net



All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.